


NEW




KLIKK SYSTEM

Low Voltage Track System

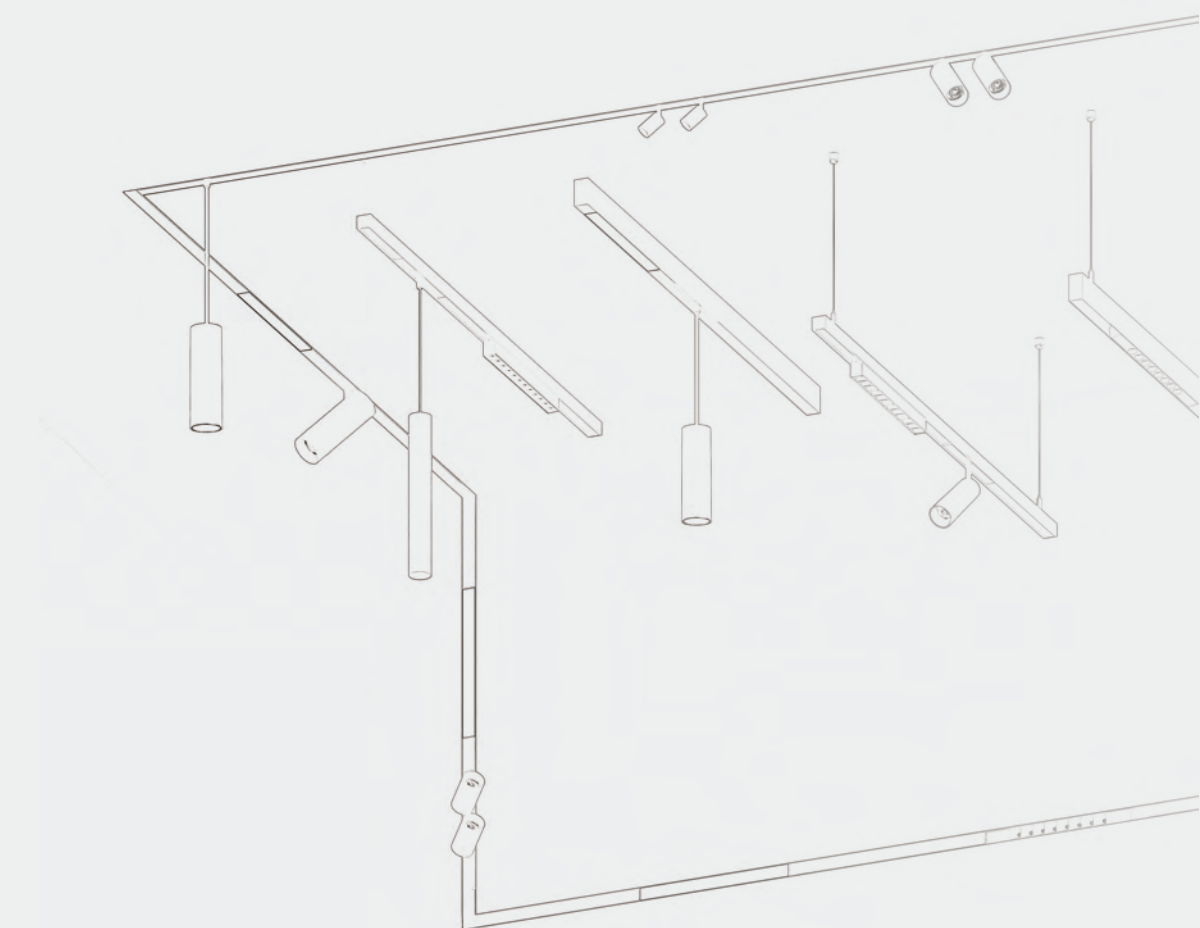

Klikk DC48V Track

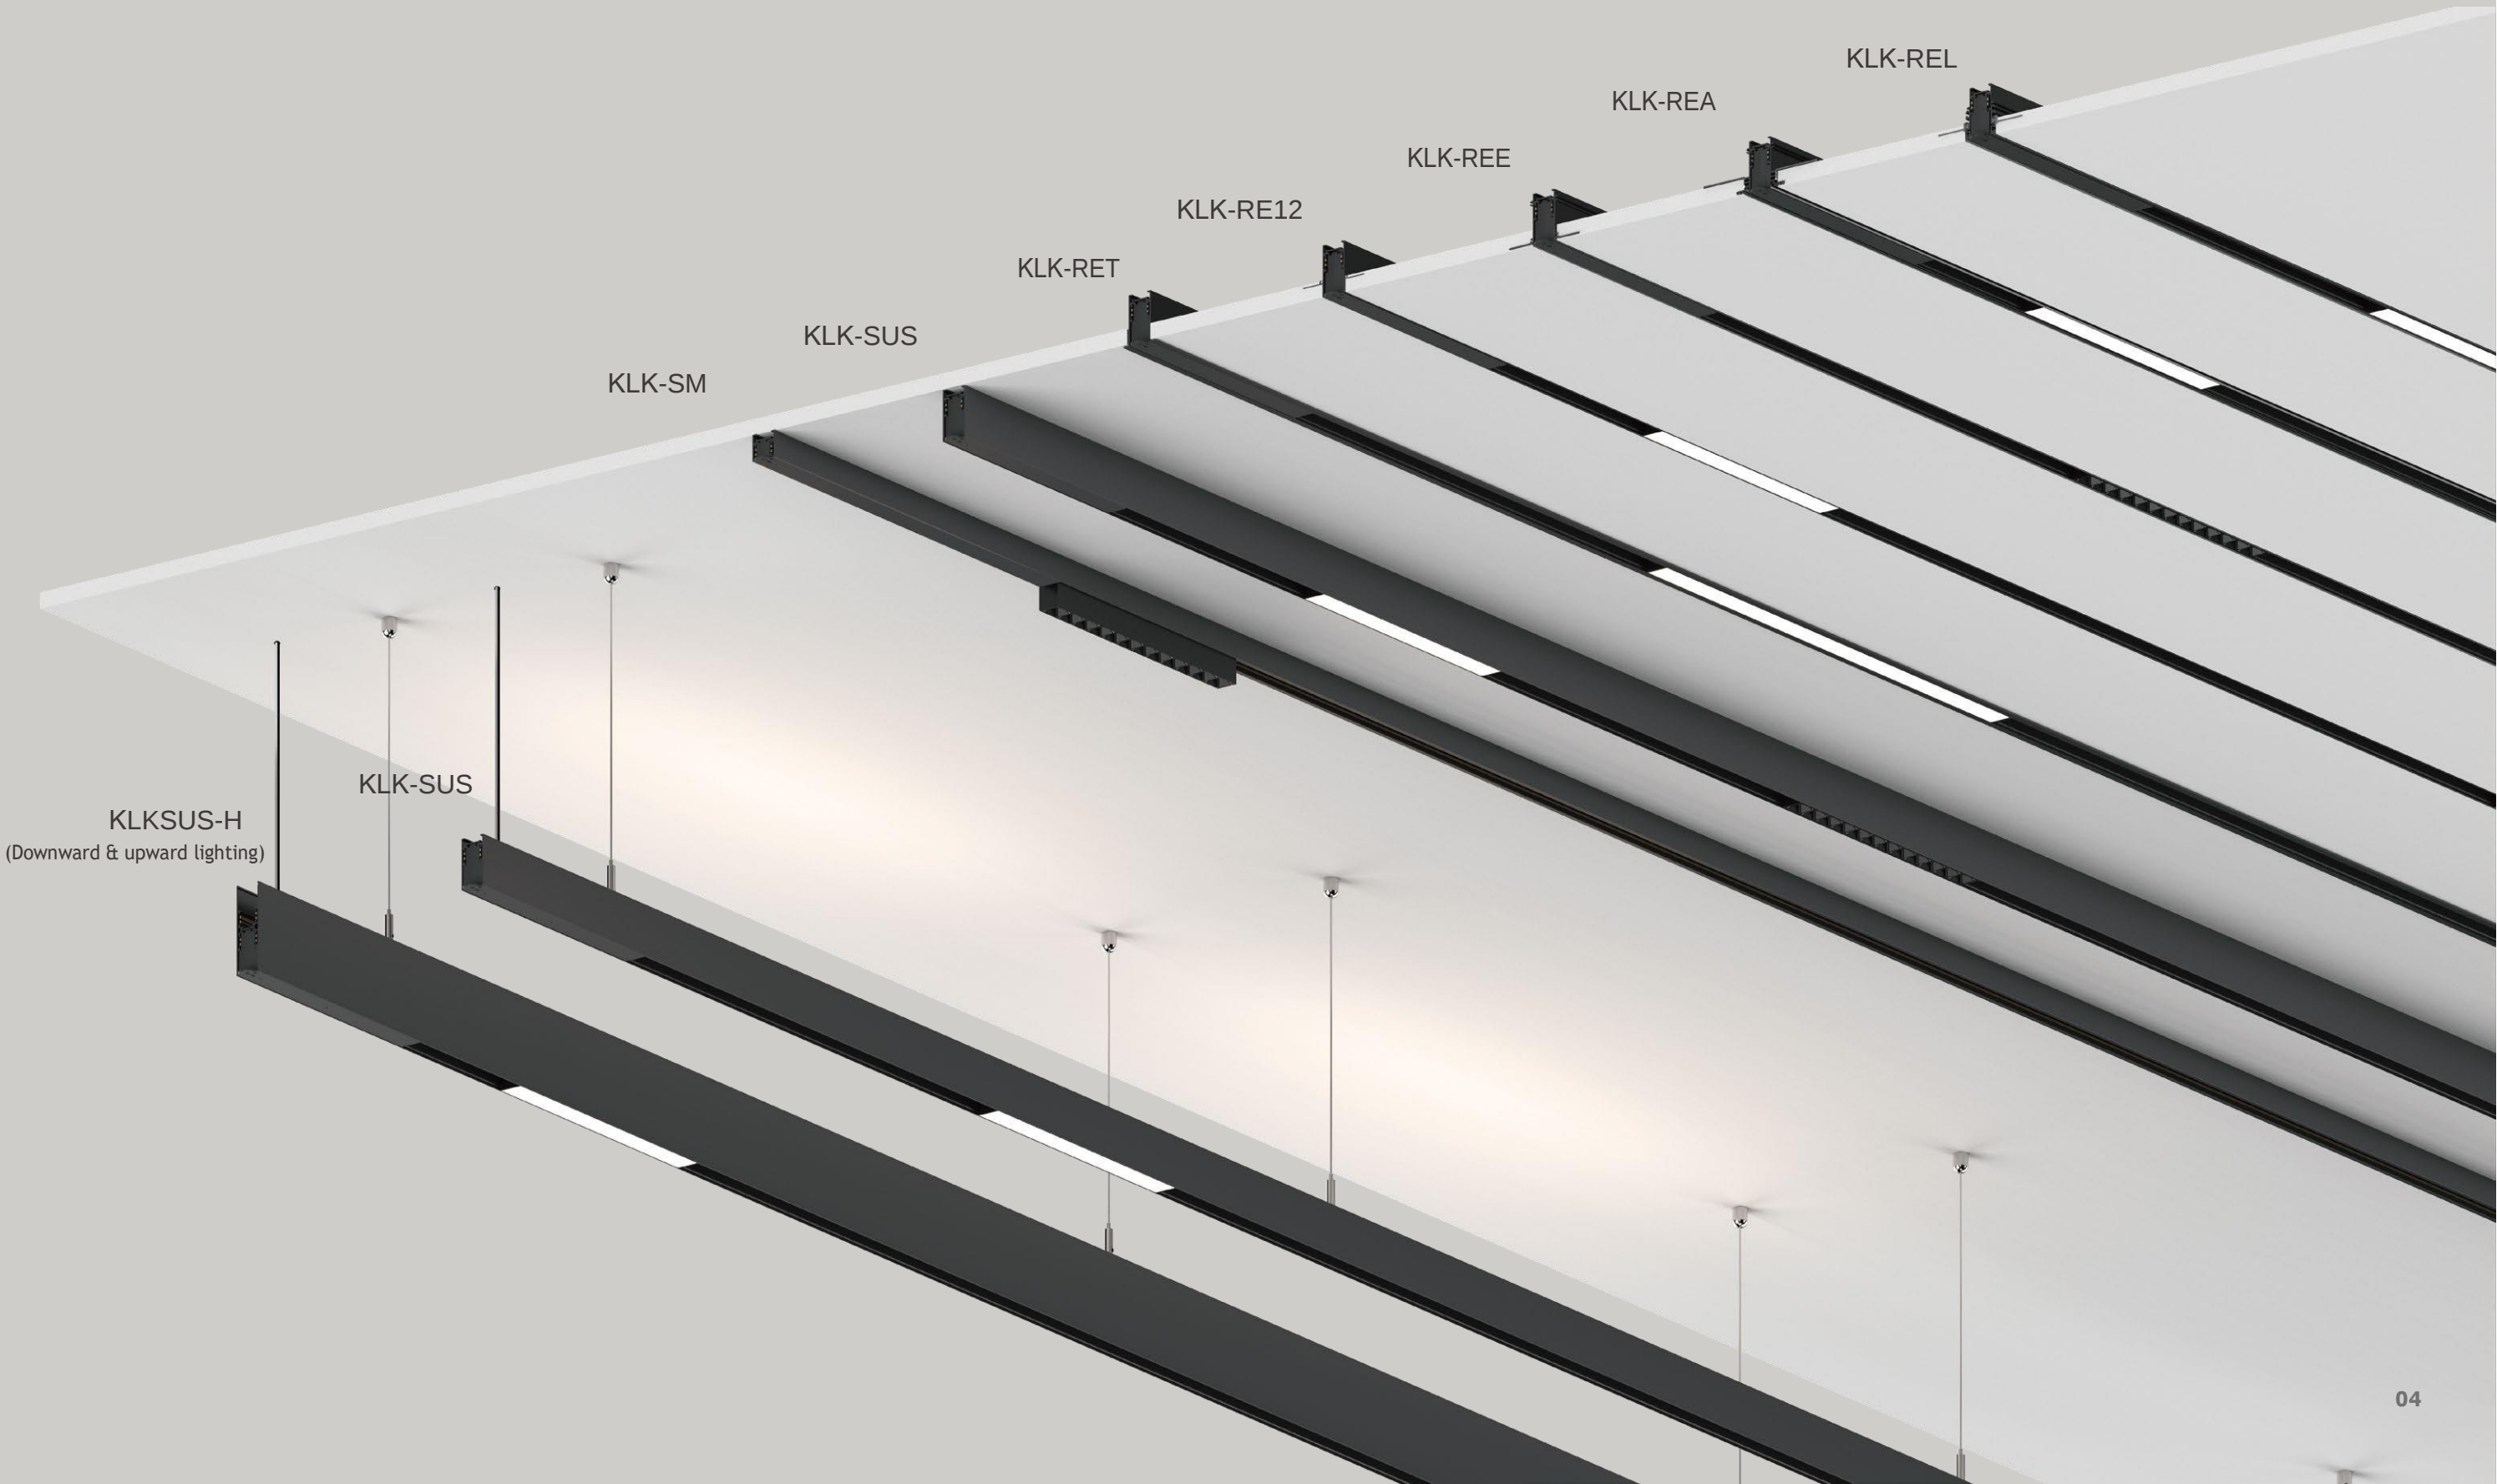



1
Surface-mounted
Track




KLK-SM
Surface-mounted



KLK-SUS
Standard




2
Suspended
Track



KLK-SUS-H
Downward & upward



KLK-SUS
Standard

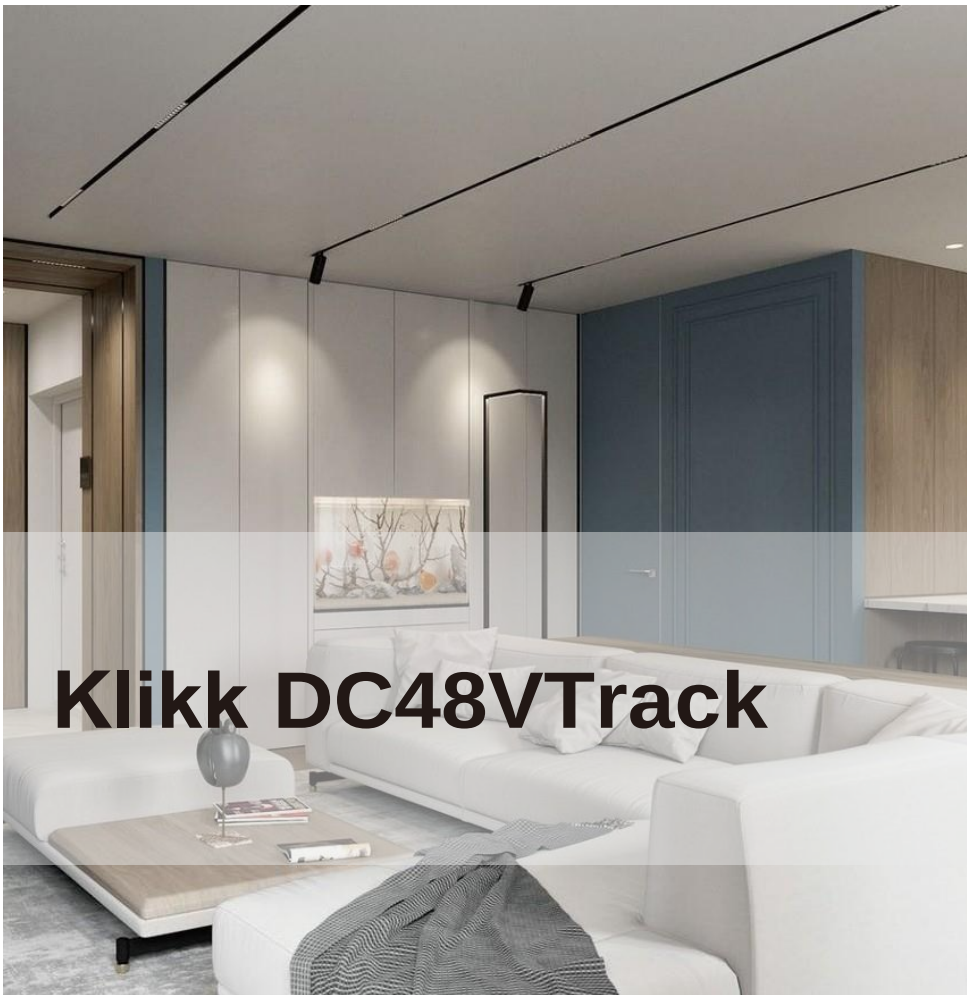

Klikk DC48VTrack



3
Recessed
Track



KLK-RET
With trim



KLK-RE12
Compatible with 1/2" ceiling



KLK-REE
Easy installation



KLK-REA
With adjustable trimless recess




KLK-REL
Compatible with various thickness of ceiling



Surface-mounted

Surface-mounted Track

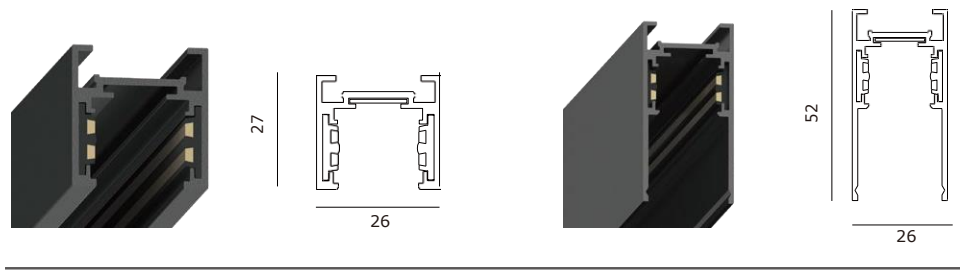


Order Options

Code	Description	Length(mm)	Powersupply	Installation
KLK-SM	surface-mounted	1000/2000/3000	built-in available	surface-mounted
KLK-SUS	standard	1000/2000/3000	built-in available	surface-mounted, suspended

Accessories

KLK-SM



KLK-LC



KLK-FEC01



KLK-SM-TEK



KLK-SM-TEKO



KLK-SM-LHC



KLK-SM-LVC



KLK-SM-LOC



KLK-SM-TC-Left



KLK-SM-TC-Right



KLK-SM-XC



KLK-SMK



KLK-EJC01




KLK-PLF01



KLK-LEF01

KLK-SUS



KLK-LC




KLK-FEC01



KLK-SUS-TEK



KLK-SUS-TEKO



KLK-SUS-LHC



KLK-SUS-LVC



KLK-SUS-LOC



KLK-SUS-TC-Left



KLK-SUS-TC-Right



KLK-SUS-XC



KLK-SMK




KLK-EJC01




KLK-PLF01



KLK-LEF01

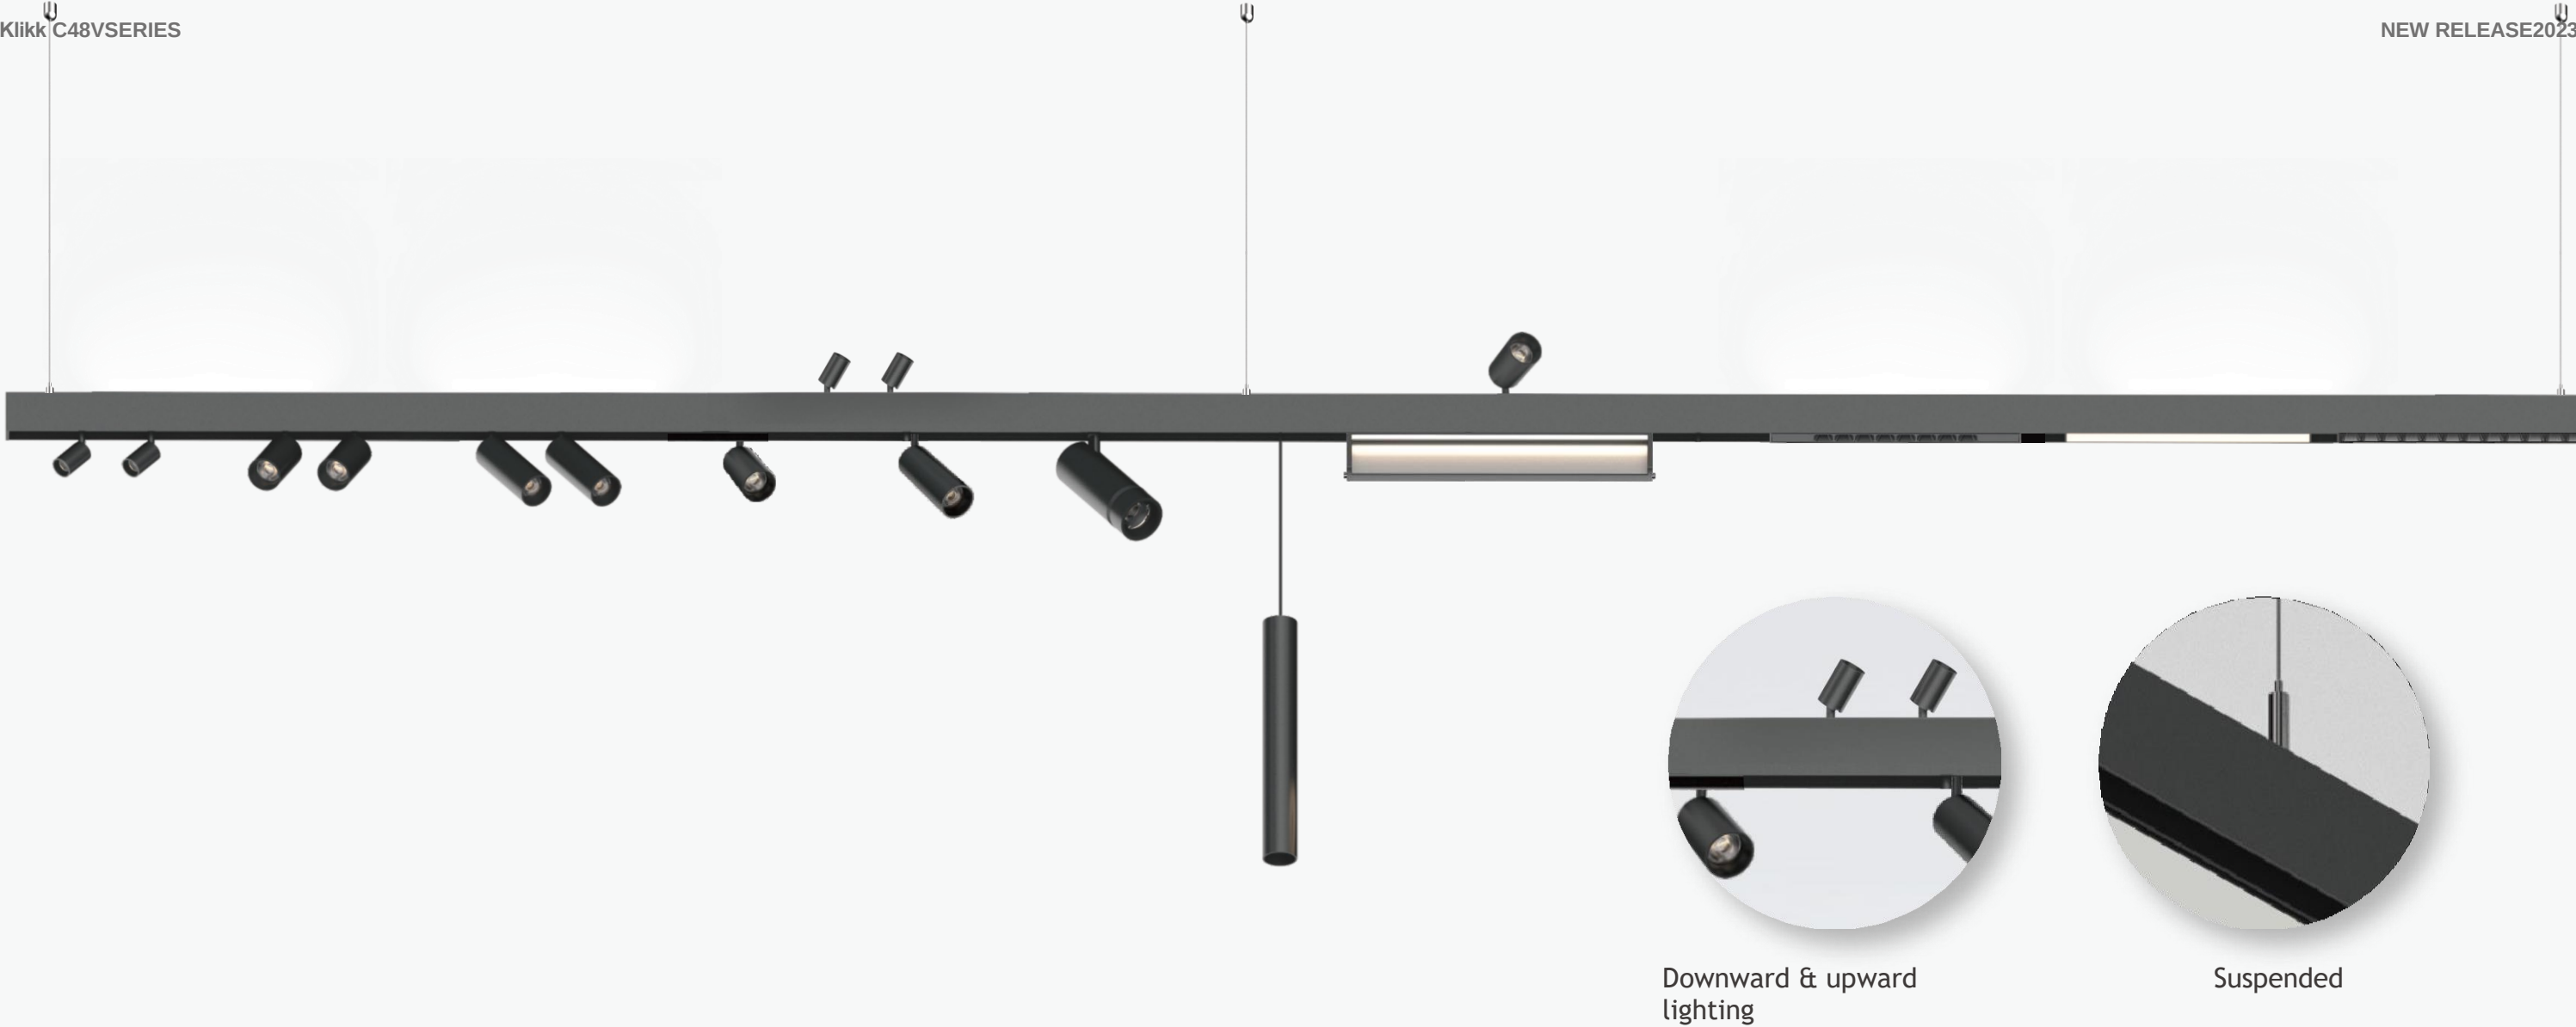

Suspended Track

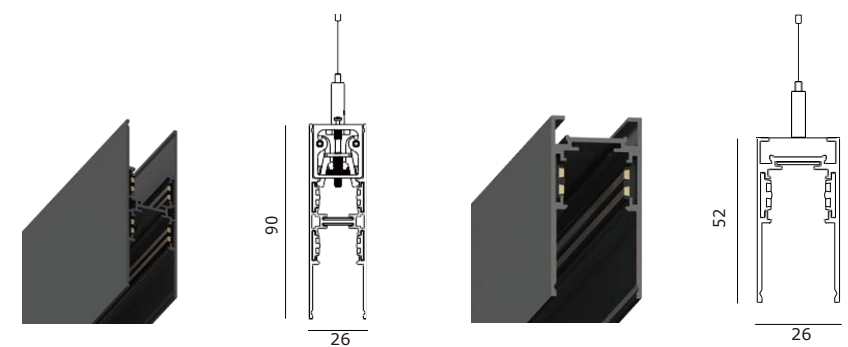


Order Options



Code	Description	Length(mm)	Power supplyInstallation
KLK-SUS	standard	1000/2000/3000	built-in available suspended
KLK-SUS-H	downward&upwardlighting	1000/2000/3000	built-inavailable suspended


Accessories

KLK-SUS



KLK-SUS-H

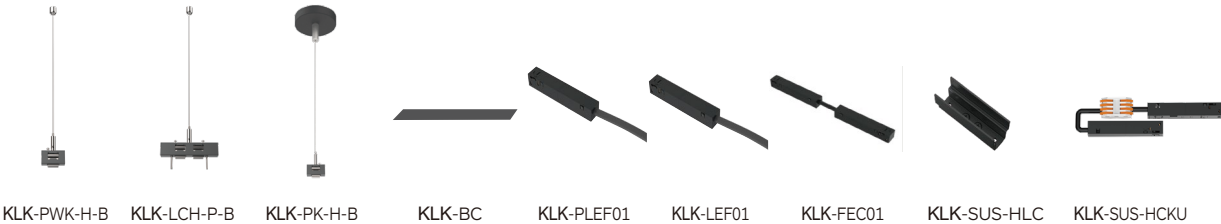

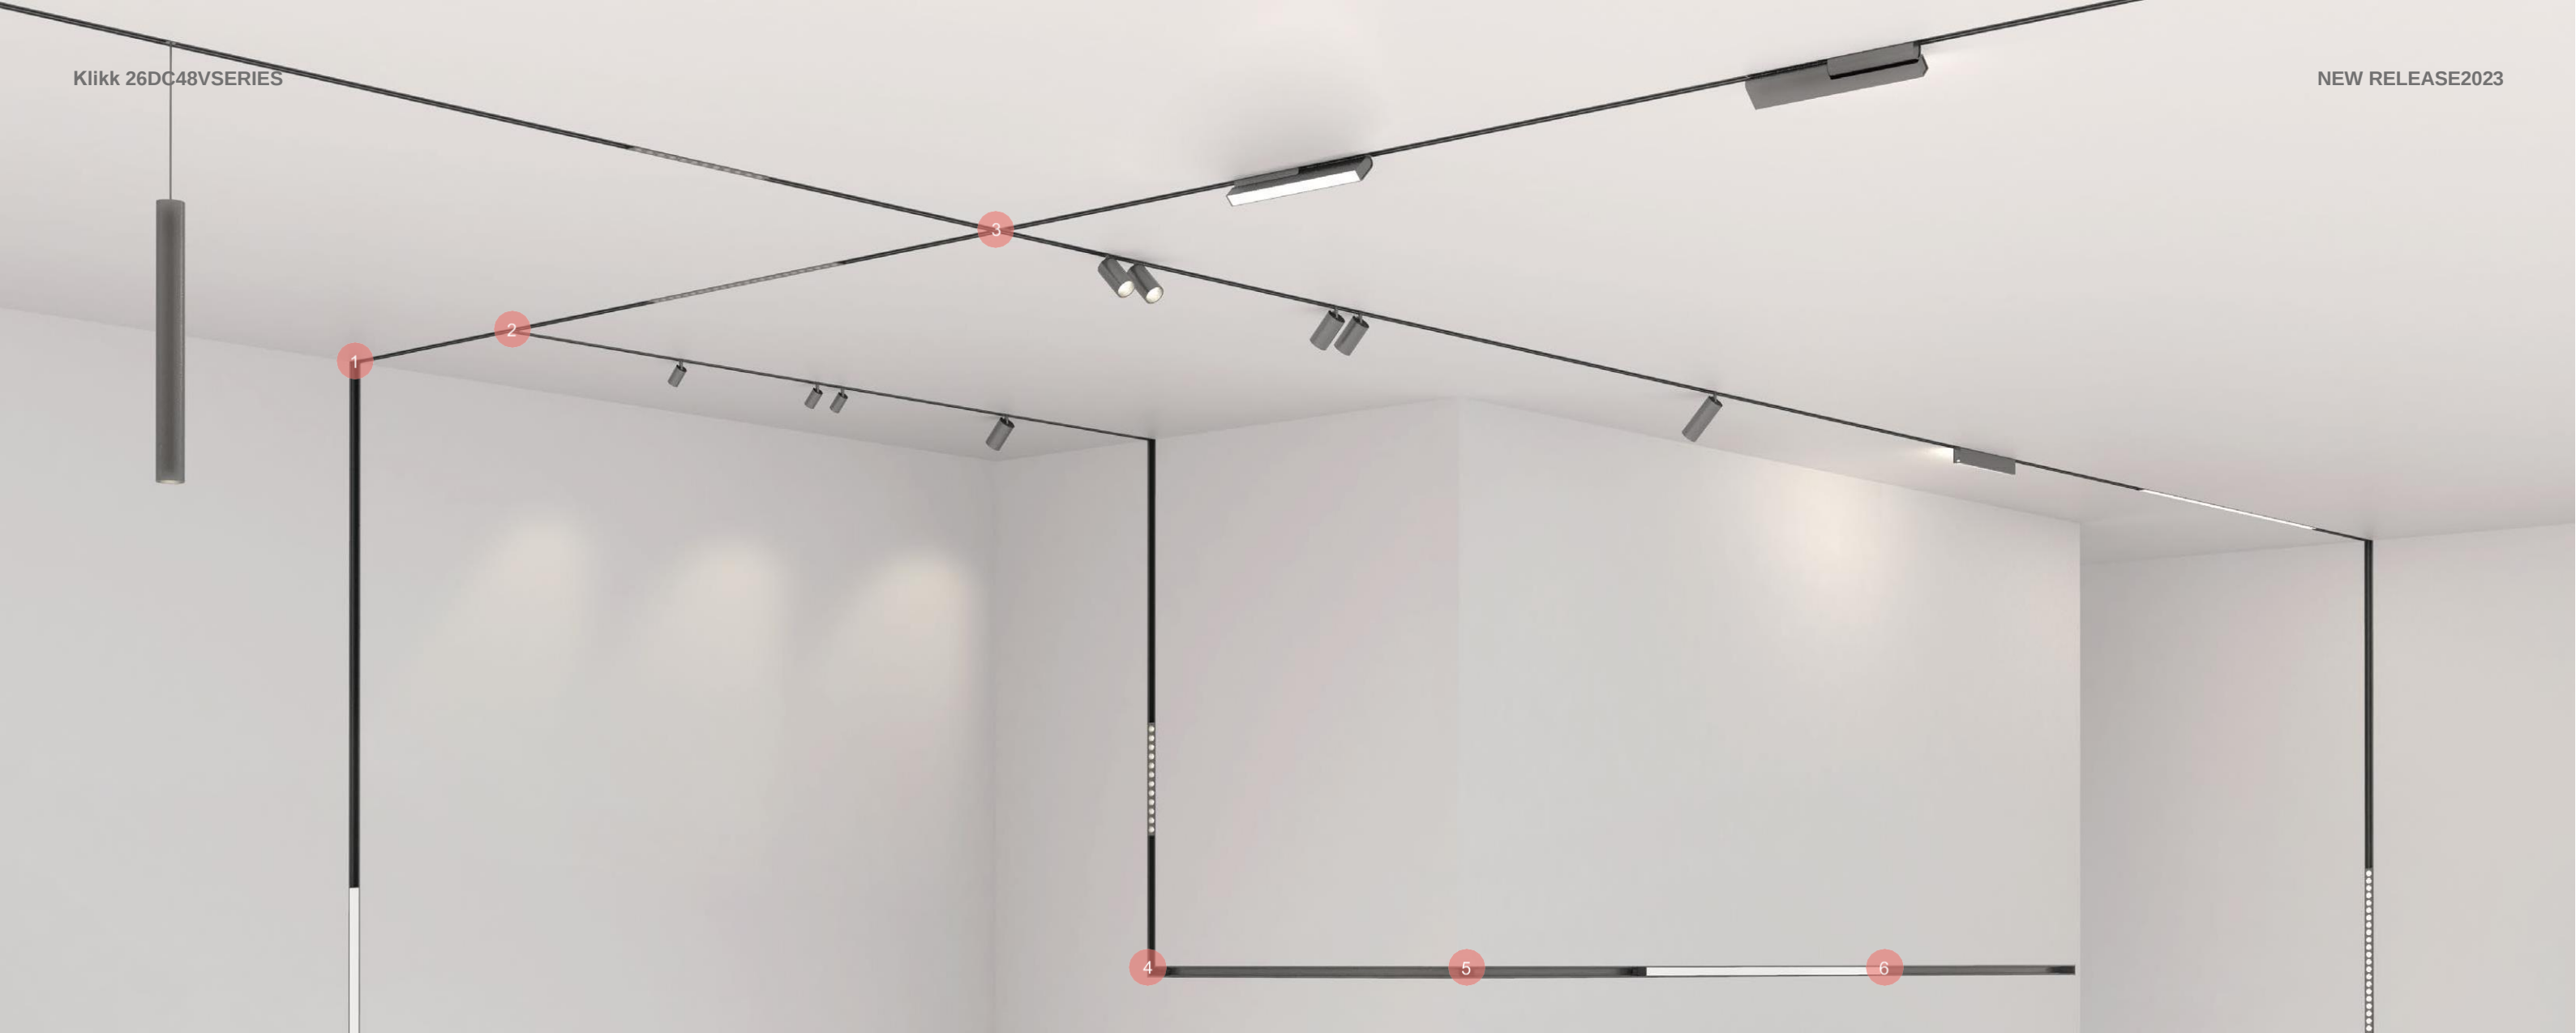

Recessed Track



KLK-RET



KLK-RE12



KLK-REE



KLK-REA



KLK-REL

Corner

1. 'L'shapeverticalcorner

2. 'T'shapecorner

3. 'X'shapecorner
4. 'L'shapecorner

5. 'L'shapeoutercorner

6. Linearconnector

Order Options

Code	Description	Length(mm)	Powersupply	Installation
KLK-RET	withtrim	1000/2000/3000	built-inavailable	recessed with trim
KLK-RE12	compatiblewith½"ceiling	1000/2000/3000	built-inavailable	trimless recessed
KLK-REE	easyinstallation	1000/2000/3000	built-inavailable	trimless recessed
KLK-REA	withadjustabletrimlessrecessedinstallationkit	1000/2000/3000	built-inavailable	trimless recessed
KLK-REL	compatiblewithvariousthicknessofceiling	1000/2000/3000	built-inavailable	trimless recessed

Accessories



KLK-RET



KLK-RET-LOC




KLK-RET-LHC



KLK-RET-LVC



KLK-RET-TC-Left



KLK-RET-TC-Right



KLK-RET-XC



KLK-RET-TEK



KLK-RET-TEKO



KLK-RTK



KLK-RLC



KLK-PLEF01



KLK-LEF01




KLK-FEC01



KLK-EJC01



HLG-60H-48
HLG-100H-48
HLG-150H-48
HLG-240H-48



KLK-RE12



KLK-RE12-LOC



KLK-RE12-LHC



KLK-RE12-LVC



KLK-RE12-TC-Left



KLK-RE12-TC-Right



KLK-RE12-XC



KLK-RE12-TEK



KLK-RE12-TEKO



KLK-RLC



KLK-PLEF01



KLK-LEF01



KLK-FEC01



KLK-EJC01



HLG-60H-48
HLG-100H-48
HLG-150H-48
HLG-240H-48



KLK-REE



KLK-REE-LOC



KLK-REE-LHC



KLK-REE-LVC




KLK-REE-TC-Left



KLK-REE-TC-Right



KLK-REE-XC



KLK-REE-TEK



KLK-REE-TEKO



KLK-RLC



KLK-PLEF01



KLK-LEF01



KLK-FEC01



KLK-EJC01



HLG-60H-48
HLG-100H-48
HLG-150H-48
HLG-240H-48

Accessories



KLK-REA




KLK-REA-LOC



KLK-REA-LHC



KLK-REA-LVC



KLK-REA-TC-Left



KLK-REA-TC-Right



KLK-REA-XC



KLK-REA-TEK



KLK-REA-TEKO



KLK-REAMK



KLK-RLC



KLK-PLEF01



KLK-LEF01



KLK-FEC01



KLK-EJC01



HLG-60H-48
HLG-100H-48
HLG-150H-48
HLG-240H-48



KLK-REL



KLK-REL-LOC




KLK-REL-LHC



KLK-REL-LVC



KLK-REL-TC-Left



KLK-REL-TC-Right



KLK-REL-XC



KLK-REL-TEK



KLK-REL-TEKO



KLK-RLC



KLK-PLEF01



KLK-LEF01




KLK-FEC01



KLK-EJC01





HLG-60H-48
HLG-100H-48
HLG-150H-48
HLG-240H-48





*Several plastic anti-deformation accessories have been put into the tracks to help each track can remain the original shape before installation.

Klikk Curve Corner






KLK-SUS-R450-1/4 CIRCLE

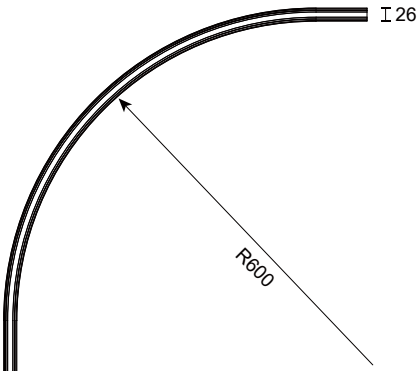



KLK-SUS-R600-1/4 CIRCLE

Klikk Curve Corner

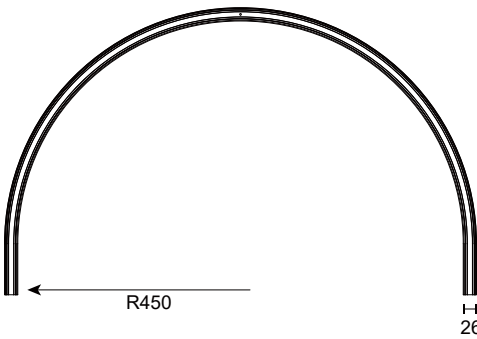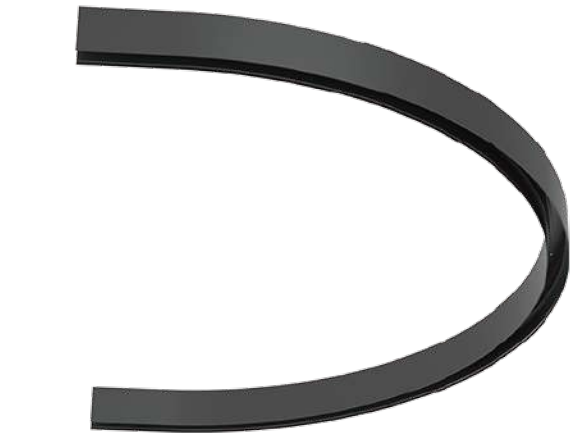


KLK-SUS-R450-1/2 CIRCLE

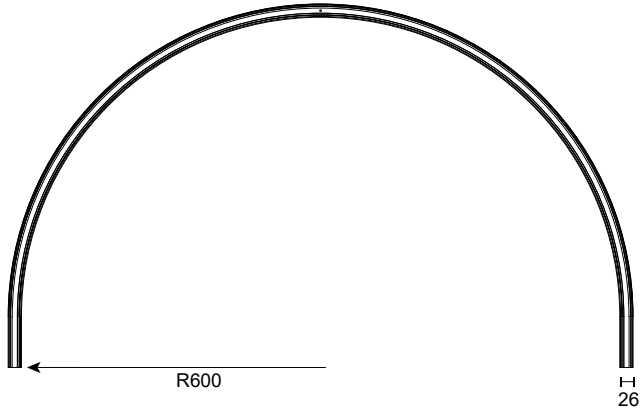

KLK-SUS-R600-1/2 CIRCLE


Klikk Curve Corner

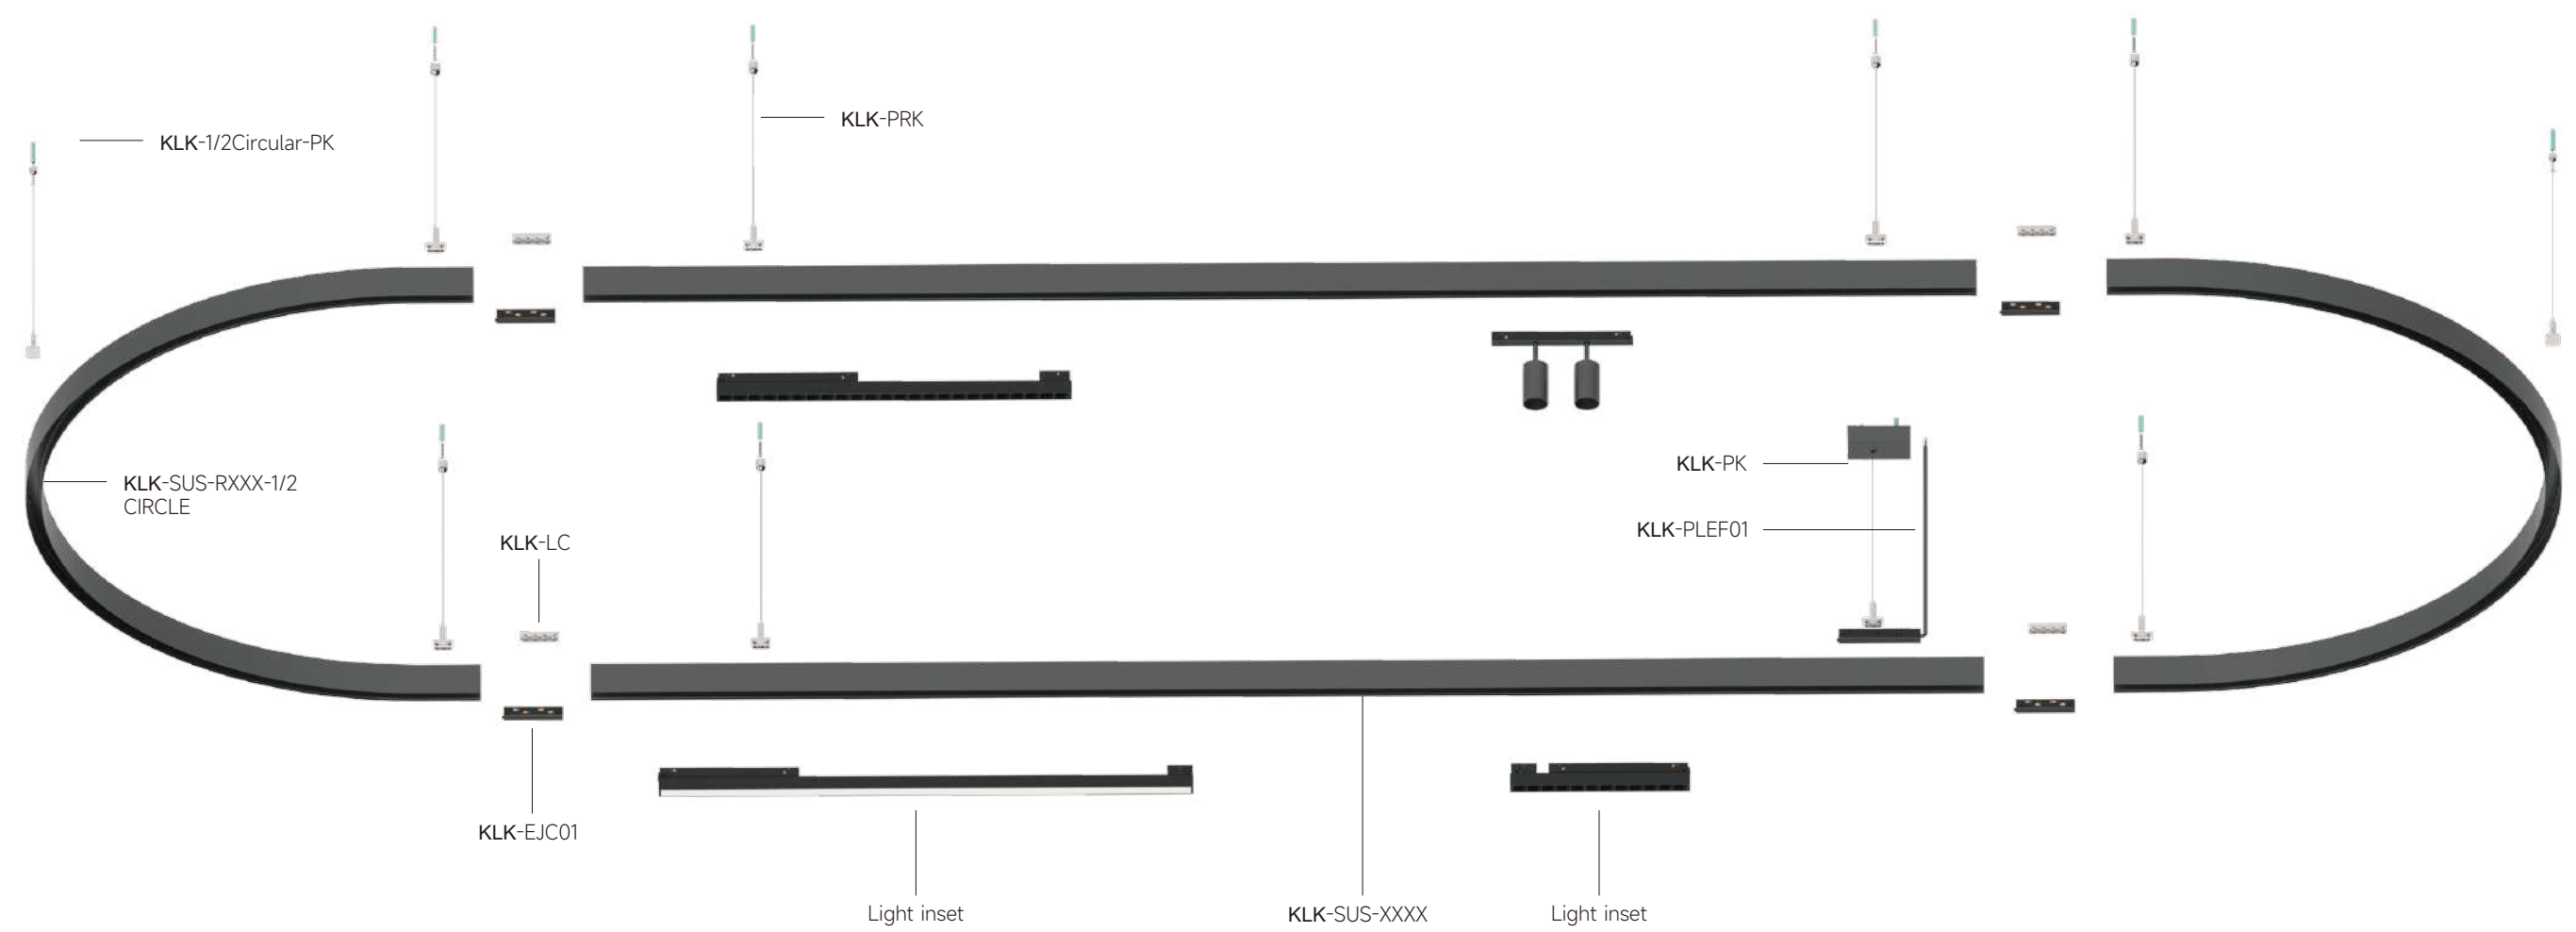

Please order installation track rail, light insets and mounting accessories separately		
Klikk High Track-Suspended 1,000mm/2000mm per piece, without endcap, without mounting		KLK-SUS-XXXX
Klikk High Track-Suspended Curve Corner Suspended Kits		KLK-1/2 CIRCLE - PK
Klikk High Track-Suspended Curve Corner R:450mm/600mm		KLK-SUS-RXXX-1/2 CIRCLE
Klikk Suspended Kits long: 2,000mm		KLK-PK
Klikk Suspended Live-end Feed with 2,000mm long cable		KLK-PLEF01
Klikk Suspended Rope Kit long: 2,000m m		KLK-PRK
Klikk Linear Connector		KLK-LC
Klikk Electrical Jointing Connector		KLK-EJC01


Installation

Surface-mounted track




Code: KLK-SM
Description: surface-mounted
Length: 1000/2000/3000(mm)
Color:RAL9005black,RAL9016white

Surface-mounted track

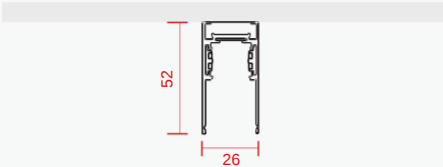


Code: KLK-SUS
Description: standard
Length: 1000/2000/3000(mm)
Color:RAL9005black,RAL9016white

Suspendedtrack

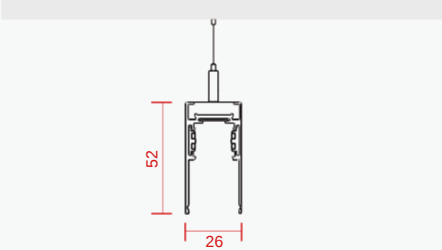


Code: KLK-SUS
Description: standard
Length: 1000/2000/3000(mm)
Color:RAL9005black,RAL9016white

Suspendedtrack

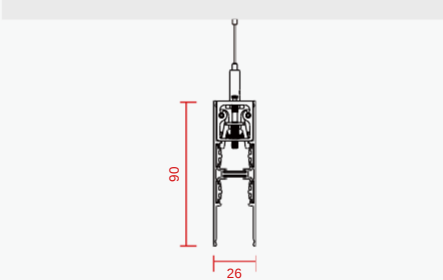


Code: KLK-SUS-H
Description: downward&upwardlighting
Length:1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Recessedtrack




Code: KLK-RET
Description: with trim
Length: 1000/2000/3000(mm)
Color:RAL9005black,RAL9016white


Recessedtrack

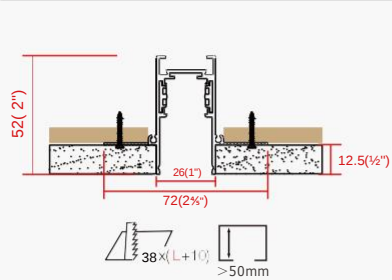


Code: KLK-RE12
Description: compatible with 1/2" ceiling
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white



Code: KLK-REE
Description: easy installation
Length: 1000/2000/3000(mm)
Color:RAL9005black,RAL9016white



Code:KLK-REA
Description: with adjustable trimless recessed installation kit
Length:1000/2000/3000(mm)
Color:RAL9005black,RAL9016white
*Compatible with the ceiling of thickness between 12.5-20.5mm



Code:KLK-REL
Description: compatible with various thickness of ceiling
Length:1000/2000/3000(mm)
Color:RAL9005black,RAL9016white
*Compatible with the ceiling of thickness: 5mm/9mm/12.5mm/15mm/18mm/20mm/25mm


**All dimensions in the catalogue in mm*

Inserts for track

Spotlight Insert




Accent Light Insert

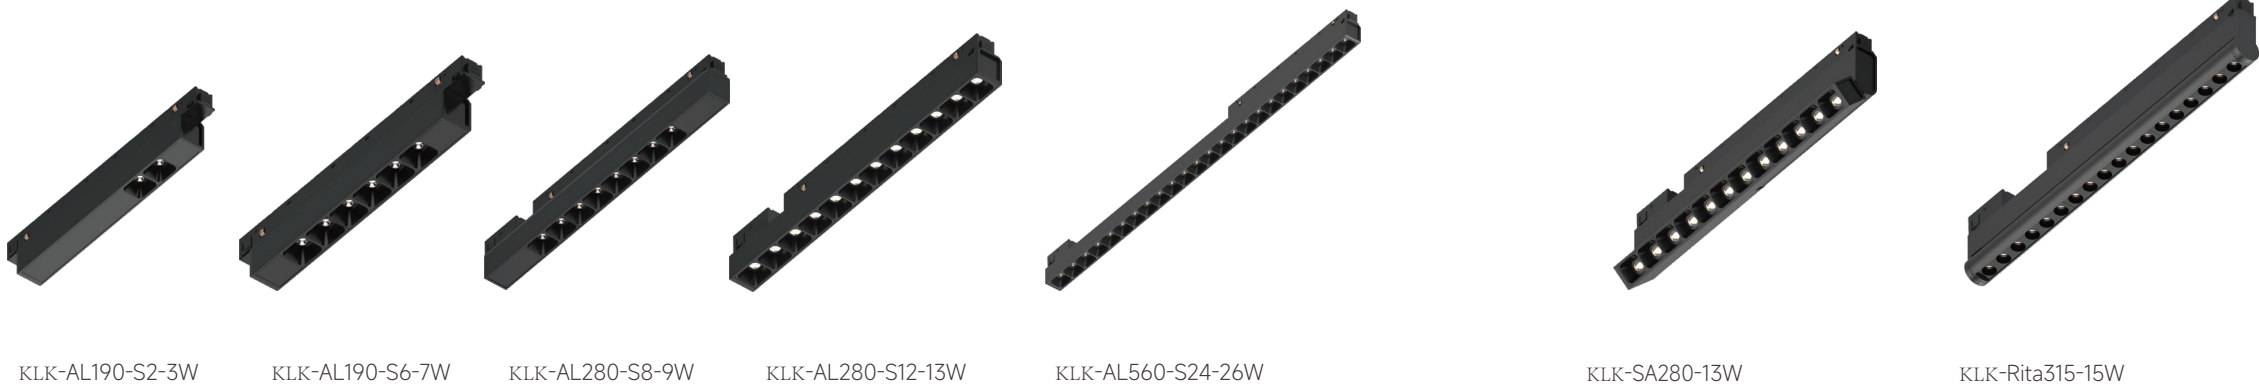

Inserts for track

General light insert

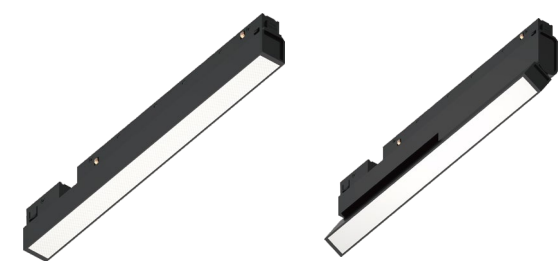

KLK-GL280-7W
KLK-GL560-13W
KLK-GL840-19W
KLK-GL1120-26W

KLK-SG280-7W

Decorative light insert




KLK-SPD120-5W

KLK-PD300-19W

KLK-SURI60-5W

Comfort light insert Wall washer insert

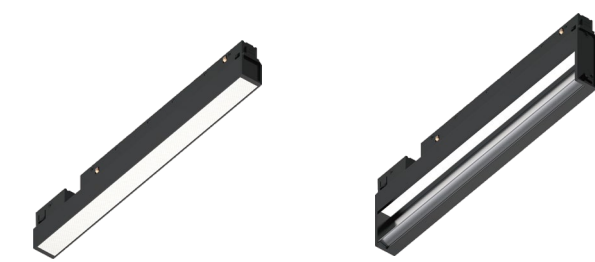

KLK-CL280-7W
KLK-CL560-13W
KLK-CL840-19W
KLK-CL1120-26W


KLK-WW280-7W
KLK-WW560-14W

Pendant Inserts



KLK-PS40-12W

KLK-PS55-14W

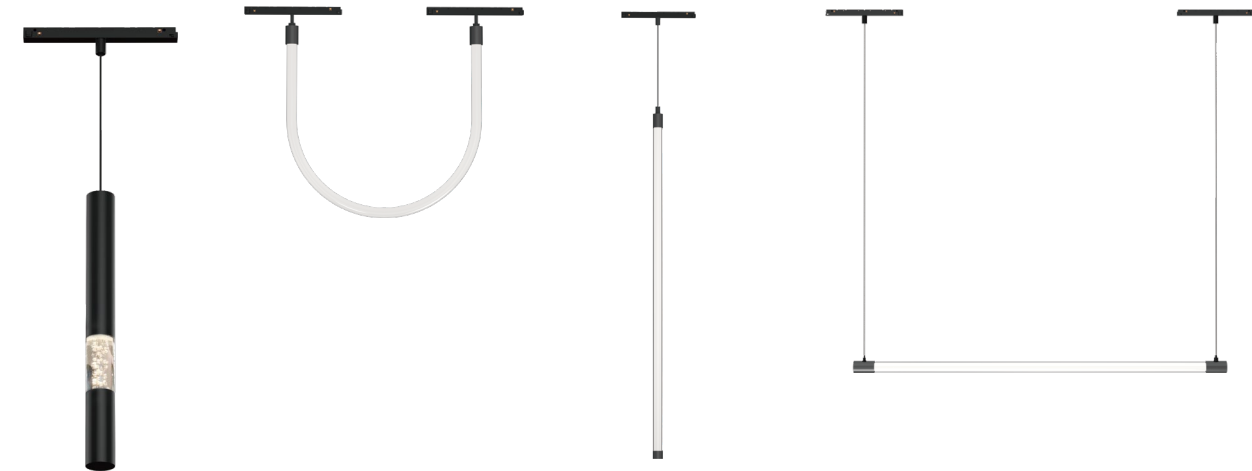

KLK-PDS40-12W

KLK-NHU12-19W

KLK-NVP12-19W

KLK-NHP10-14W

Downlight insert



KLK-WRD72-10W

KLK-WRD72-T2-20W

KLK-RS80-SL-10W

KLK-RS80-ST-10W

KLK-SS80-SL-10W


KLK-SS80-ST-10W



SpotlightInsert



Drawings

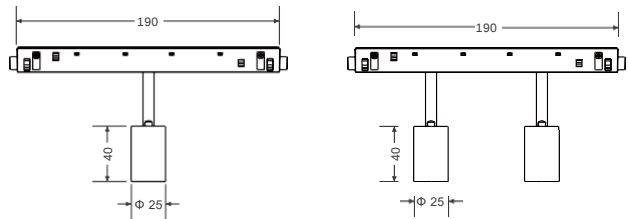


Order Options

KLK-RS25-3W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-RS40-3W-930-18	180Lm	3W	DC48V	90	3000K	18°
KLK-RS40-3W-940-18	190Lm				4000K	
KLK-RS40-3W-930-30	180Lm	3W	DC48V	90	3000K	30°
KLK-RS40-3W-940-30	190Lm				4000K	
KLK-RS40-3W-930-45	180Lm	3W	DC48V	90	3000K	45°
KLK-RS40-3W-940-45	190Lm				4000K	
KLK-RS25-5W						
KLK-RS40-5W-930-18	350Lm	5W	DC48V	90	3000K	18°
KLK-RS40-5W-940-18	380Lm				4000K	
KLK-RS40-5W-930-30	350Lm	5W	DC48V	90	3000K	30°
KLK-RS40-5W-940-30	380Lm				4000K	
KLK-RS40-5W-930-45	350Lm	5W	DC48V	90	3000K	45°
KLK-RS40-5W-940-45	380Lm				4000K	

SpotlightInsert



Drawings

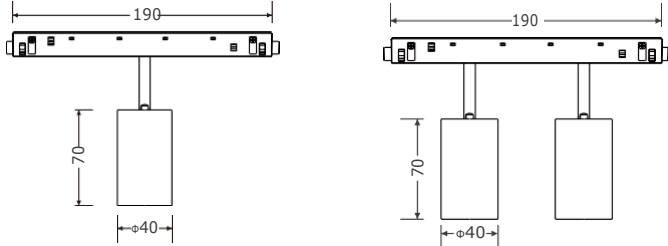

Order Options


KLK-RS40-8W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-RS40-8W-930-18	580Lm	8W	DC48V	90	3000K	18°
KLK-RS40-8W-940-18	620Lm				4000K	
KLK-RS40-8W-930-30	580Lm	8W	DC48V	90	3000K	30°
KLK-RS40-8W-940-30	620Lm				4000K	
KLK-RS40-8W-930-45	580Lm	8W	DC48V	90	3000K	45°
KLK-RS40-8W-940-45	620Lm				4000K	
KLK-RS40-16W						
KLK-RS40-16W-930-18	1100Lm	16W	DC48V	90	3000K	18°
KLK-RS40-16W-940-18	1200Lm				4000K	
KLK-RS40-16W-930-30	1100Lm	16W	DC48V	90	3000K	30°
KLK-RS40-16W-940-30	1200Lm				4000K	
KLK-RS40-16W-930-45	850Lm	16W	DC48V	90	3000K	45°
KLK-RS40-16W-940-45	900Lm				4000K	



SpotlightInsert




Drawings

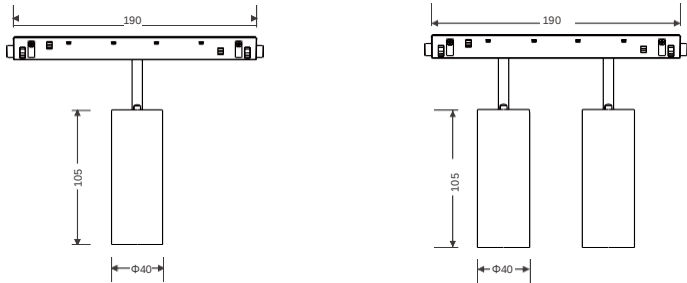

Order Options


KLK-RS40-12W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-RS40-12W-930-18	750Lm	12W	DC48V	90	3000K	18°
KLK-RS40-12W-940-18	800Lm				4000K	
KLK-RS40-12W-930-30	750Lm	12W	DC48V	90	3000K	30°
KLK-RS40-12W-940-30	800Lm				4000K	
KLK-RS40-12W-930-45	600Lm	12W	DC48V	90	3000K	45°
KLK-RS40-12W-940-45	650Lm				4000K	
KLK-RS40-24W						
KLK-RS40-24W-930-18	1500Lm	24W	DC48V	90	3000K	18°
KLK-RS40-24W-940-18	1600Lm				4000K	
KLK-RS40-24W-930-30	1500Lm	24W	DC48V	90	3000K	30°
KLK-RS40-24W-940-30	1600Lm				4000K	
KLK-RS40-24W-930-45	1200Lm	24W	DC48V	90	3000K	45°
KLK-RS40-24W-940-45	1300Lm				4000K	

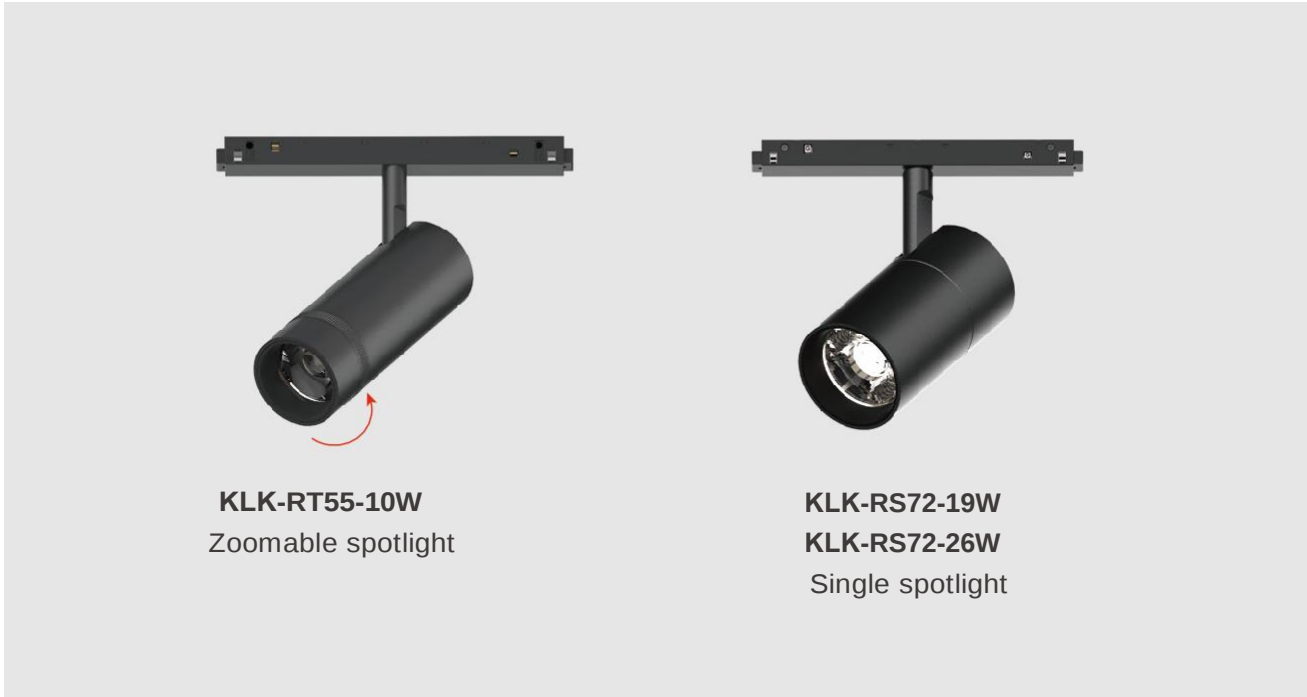

SpotlightInsert



Drawings

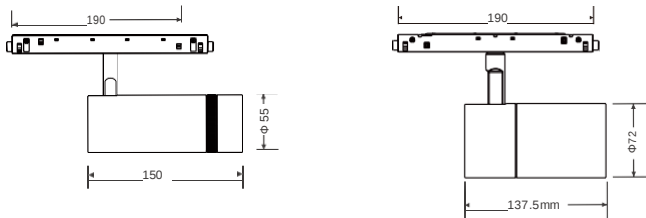

Order Options


KLK-RT55-10W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-RT55-10W-930	800Lm	10W	DC48V	90	3000K	20° -40°
KLK-RT55-10W-940	850Lm				4000K	
KLK-RT55-10W-930	750Lm	10W	DC48V	90	3000K	35°-60°
KLK-RT55-10W-940	800Lm				4000K	
KLK-RS72-19W						
KLK-RS72-19W-930-20	1700Lm	19W	DC48V	90	3000K	20°
KLK-RS72-19W-940-20	1800Lm				4000K	
KLK-RS72-19W-930-35	1700Lm	19W	DC48V	90	3000K	35°
KLK-RS72-19W-940-35	1800Lm				4000K	
KLK-RS72-19W-930-55	1700Lm	19W	DC48V	90	3000K	55°
KLK-RS72-19W-940-55	1800Lm				4000K	
KLK-RS72-26W						
KLK-RS72-26W-930-20	2300Lm	26W	DC48V	90	3000K	20°
KLK-RS72-26W-940-20	2500Lm				4000K	
KLK-RS72-26W-930-35	2300Lm	26W	DC48V	90	3000K	35°
KLK-RS72-26W-940-35	2500Lm				4000K	
KLK-RS72-26W-930-55	2300Lm	26W	DC48V	90	3000K	55°
KLK-RS72-26W-940-55	2500Lm				4000K	



Spotlight Insert



Drawings




Order Options

KLK-WRS96-9W						
Code	System LM	SystemW	InputVoltage	CRI	CCT	Beam
KLK-WRS96-9W-930-15	720Lm	9W	DC48V	90	3000K	15°
KLK-WRS96-9W-940-15	780Lm				4000K	
KLK-WRS96-9W-930-25	750Lm	9W	DC48V	90	3000K	25°
KLK-WRS96-9W-940-25	830Lm				4000K	
KLK-WRS96-9W-930-35	750Lm	9W	DC48V	90	3000K	35°
KLK-WRS96-9W-940-35	830Lm				4000K	

Optional




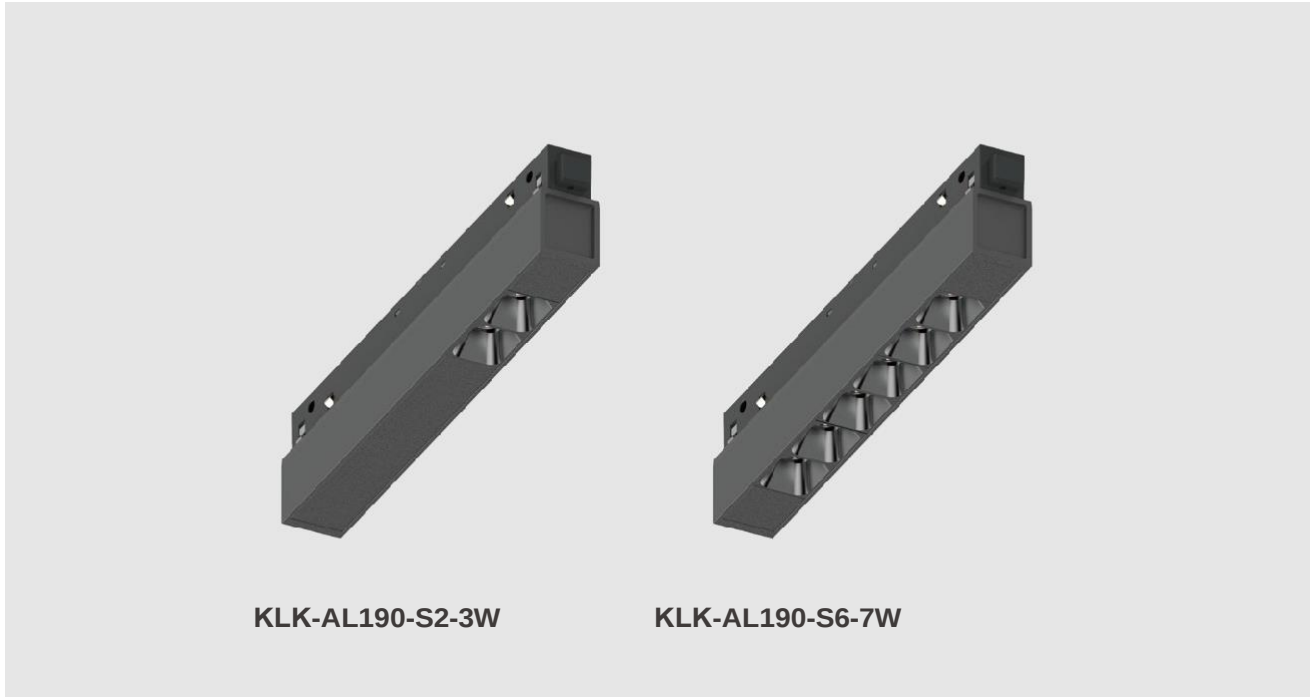

Accent LightInsert



Drawings




Order Options

KLK-AL190-S2-3W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-AL190-S2-3W-930-20	180Lm	3W	DC48V	90	3000K	20°
KLK-AL190-S2-3W-940-20	200Lm				4000K	
KLK-AL190-S2-3W-930-35	180Lm	3W	DC48V	90	3000K	35°
KLK-AL190-S2-3W-940-35	200Lm				4000K	
KLK-AL190-S6-7W						
KLK-AL190-S6-7W-930-20	550Lm	7W	DC48V	90	3000K	20°
KLK-AL190-S6-7W-940-20	600Lm				4000K	
KLK-AL190-S6-7W-930-35	550Lm	7W	DC48V	90	3000K	35°
KLK-AL190-S6-7W-940-35	600Lm				4000K	

Accent LightInsert



Drawings



Order Options

KLK-AL280-S8-9W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-AL280-S8-9W-930-20	750Lm	9W	DC48V	90	3000K	20°
KLK-AL280-S8-9W-940-20	800Lm				4000K	
KLK-AL280-S8-9W-930-35	750Lm	9W	DC48V	90	3000K	35°
KLK-AL280-S8-9W-940-35	800Lm				4000K	
KLK-AL280-S12-13W						
KLK-AL280-S12-13W-930-20	1100Lm	13W	DC48V	90	3000K	20°
KLK-AL280-S12-13W-940-20	1200Lm				4000K	
KLK-AL280-S12-13W-930-35	1100Lm	13W	DC48V	90	3000K	35°
KLK-AL280-S12-13W-940-35	1200Lm				4000K	




Accent LightInsert




Accent LightInsert



Drawings

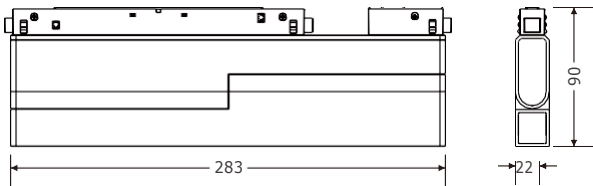

Drawings

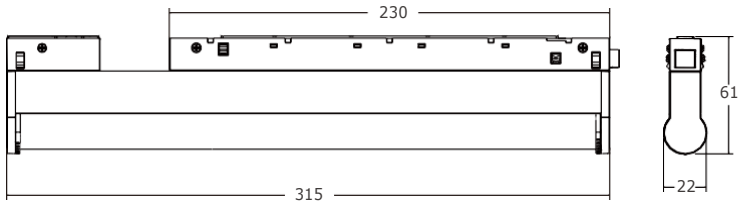


Order Options

KLK-SA280-13W						
Code	System LM	System W	InputVoltage	CRI	CCT	Beam
KLK-SA280-13W-930-20	1100Lm	13W	DC48V	90	3000K	20°
KLK-SA280-13W-940-20	1200Lm					
KLK-SA280-13W-930-35	1100Lm	13W	DC48V	90	3000K	35°
KLK-SA280-13W-940-35	1200Lm					

Order Options


KLK-Rita315-15W						
Code	System LM	SystemW	InputVoltage	CRI	CCT	Beam
KLK-Rita315-15W-930-30	1100Lm	15W	DC48V	90	3000K	30°
KLK-Rita315-15W-940-30	1180Lm					

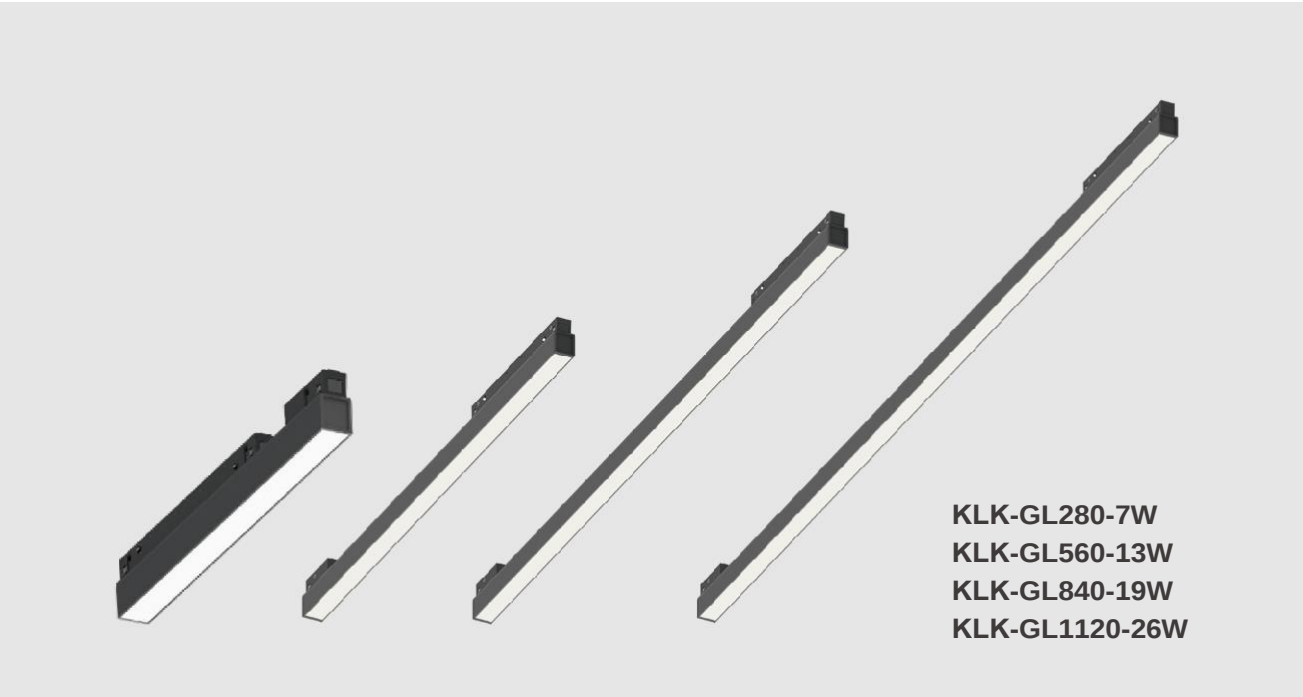

General Light Insert



Drawings



Order Options


KLK-GL280-7W							
Code		SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK -GL280-7W-930-110		400Lm	7W	DC48V	90	3000K	110°
KLK -GL280-7W-940-110		450Lm				4000K	
KLK-GL560-13W							
KLK -GL560-13W-930-110		800Lm	13W	DC48V	90	3000K	110°
KLK -GL560-13W-940-110		850Lm				4000K	
KLK-GL840-19W							
KLK -GL840-19W-930-110		1200Lm	19W	DC48V	90	3000K	110°
KLK -GL840-19W-940-110		1300Lm				4000K	
KLK-GL1120-26W							
KLK -GL1120-26W-930-110		1600Lm	26W	DC48V	90	3000K	110°
KLK -GL1120-26W-940-110		1700Lm				4000K	



General Light Insert




Drawings

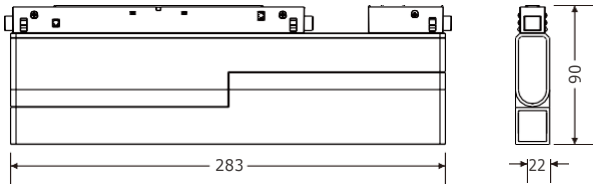

Order Options


KLK-SG280-7W						
Code	System LM	SystemW	InputVoltage	CRI	CCT	Beam
KLK -SG280-7W-930-110	400Lm	7W	DC48V	90	3000K	110°
KLK -SG280-7W-940-110	450Lm				4000K	

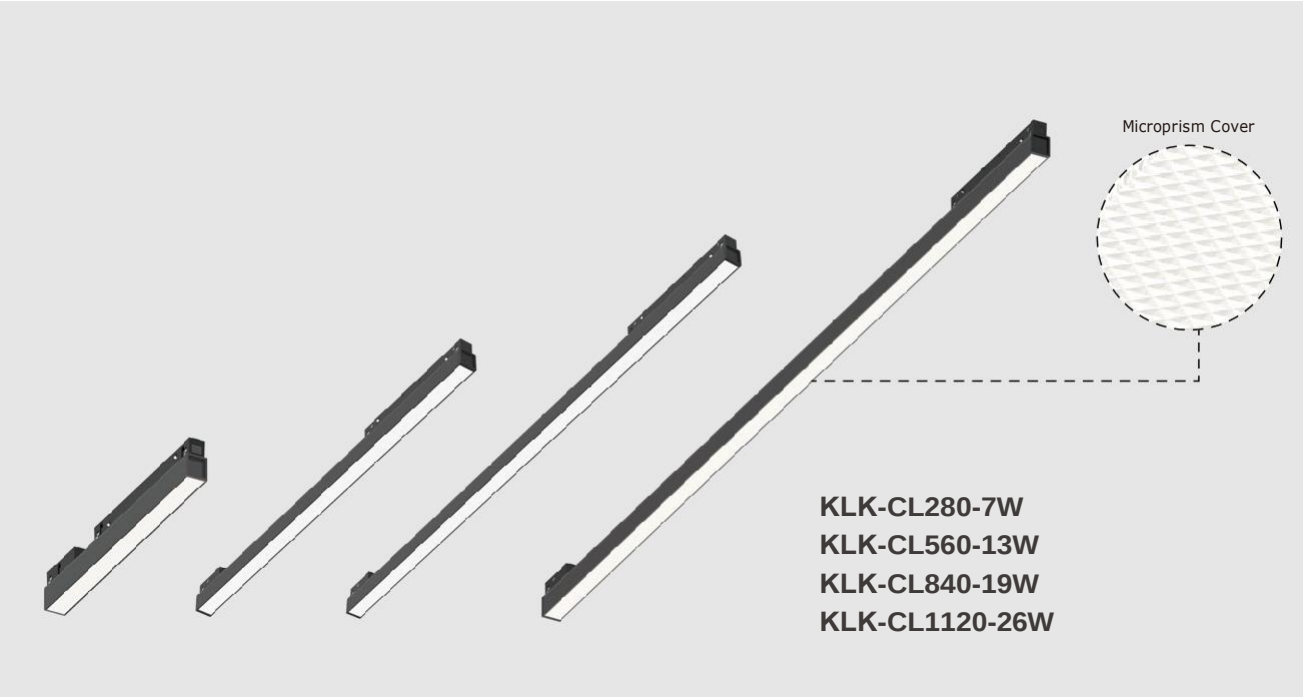

Comfort Light Insert



Drawings



Order Options


KLK-CL280-7W							
Code		System LM	System W	InputVoltage	CRI	CCT	Beam
KLK -CL280-7W-930-65		380Lm	7W	DC48V	90	3000K	65°
KLK -CL280-7W-940-65		420Lm				4000K	
KLK-CL560-13W							
KLK -CL560-13W-930-65		750Lm	13W	DC48V	90	3000K	65°
KLK -CL560-13W-940-65		800Lm				4000K	
KLK-CL840-19W							
KLK -CL840-19W-930-65		1100Lm	19W	DC48V	90	3000K	65°
KLK -CL840-19W-940-65		1200Lm				4000K	
KLK-CL1120-26W							
KLK -CL1120-26W-930-65		1500Lm	26W	DC48V	90	3000K	65°
KLK -CL1120-26W-940-65		1600Lm				4000K	



Wall Washer Insert



Drawings



Order Options


KLK-WW280-7W						
Code	System LM	System W	InputVoltage	CRI	CCT	Beam
KLK-WW280-7W-930	350Lm	7W	DC48V	90	3000K	Wall Washer
KLK-WW280-7W-940	380Lm				4000K	Wall Washer
KLK-WW560-13W						
KLK-WW560-13W-930	700Lm	13W	DC48V	90	3000K	Wall Washer
KLK-WW560-13W-940	750Lm				4000K	Wall Washer



Downlight insert



Drawings

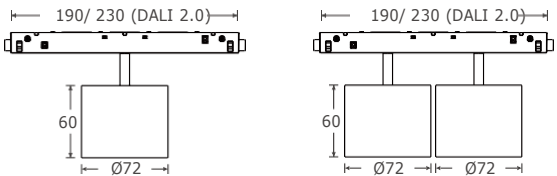

Order Options

KLK-WRD72-10W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-WRD72-10W-930-25	700Lm	10W	DC48V	90	3000K	25°
KLK-WRD72-10W-940-25	750Lm				4000K	
KLK-WRD72-10W-930-36	750Lm	10W	DC48V	90	3000K	36°
KLK-WRD72-10W-940-36	800Lm				4000K	
KLK-WRD72-10W-930-50	750Lm	10W	DC48V	90	3000K	50°
KLK-WRD72-10W-940-50	800Lm				4000K	
KLK-WRD72-T2-20W						
KLK-WRD72-T2-20W-930-25	1400Lm	20W	DC48V	90	3000K	25°
KLK-WRD72-T2-20W-940-25	1500Lm				4000K	
KLK-WRD72-T2-20W-930-36	1500Lm	20W	DC48V	90	3000K	36°
KLK-WRD72-T2-20W-940-36	1600Lm				4000K	
KLK-WRD72-T2-20W-930-50	1500Lm	20W	DC48V	90	3000K	50°
KLK-WRD72-T2-20W-940-50	1600Lm				4000K	

Accessory Optional




Reflector






Downlight

Low Voltage System



White Black

Drawings

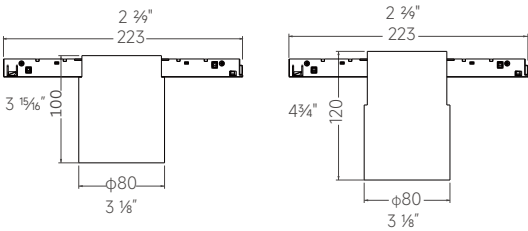

Order Options



KLK-RS80-SL-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-RS80-SL-10W-930	900lm	9W	10W	DC48V	90	3000K	30°
KLK-RS80-SL-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°


KLK-RS80-ST-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-RS80-ST-10W-930	900lm	9W	10W	DC48V	90	3000K	30°
KLK-RS80-ST-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°

Optional color




Downlight

Low Voltage System



White Black

Drawings

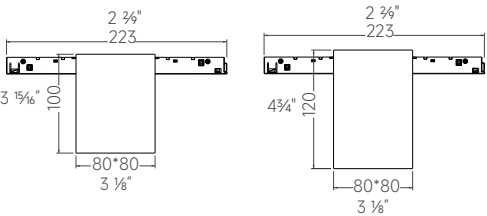


Order Options



KLK-SS80-SL-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-SS80-SL-10W-930	1000lm	9W	10W	DC48V	90	3000K	30°
KLK-SS80-SL-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°

KLK-SS80-ST-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-SS80-ST-10W-930	1000lm	9W	10W	DC48V	90	3000K	30°
KLK-SS80-ST-10W-940	1100lm	9W	10W	DC48V	90	4000K	30°

Optional color





KLK-SPD120-10W



KLK-PD300-18W

Decorativelightinsert



Drawings



Order Options

KLK-SPD120-10W						
Code	System LM	System W	InputVoltage	CRI	CCT	Beam
KLK-SPD120-10W-930-180	650Lm	10W	DC48V	90	3000K	180°
KLK-SPD120-10W-940-180	700Lm				4000K	

Optional




Black White Silver Golden

Decorative lightinsert



Drawings



Order Options

KLK-PD300-B-18W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-PD300-B-18W-930-60	1100Lm	18W	DC48V	90	3000K	60°
KLK-PD300-B-18W-940-60	1200Lm				4000K	60°

KLK-PD300-W-18W						
KLK -PD300-W-18W-930-60LK	1100Lm	18W	DC48V	90	3000K	60°
-PD300-W-18W-940-60	1200Lm				4000K	60°

Optional




White



Decorativelightinsert



Drawings



Order Options

KLK-PS40-12W

Code	System LM	System W	InputVoltage	CRI	CCT	Beam
KLK-PS40-12W-930-18	750Lm	12W	DC48V	90	3000K	18°
KLK-PS40-12W-940-18	800Lm					
KLK-PS40-12W-930-30	750Lm	12W	DC48V	90	3000K	30°
KLK-PS40-12W-940-30	800Lm					
KLK-PS40-12W-930-45	600Lm	12W	DC48V	90	3000K	45°
KLK-PS40-12W-940-45	650Lm					


KLK-PS55-14W

KLK-PS55-14W-930-18	950Lm	14W	DC48V	90	3000K	18°
KLK-PS55-14W-940-18	1000Lm					
KLK-PS55-14W-930-24	950Lm	14W	DC48V	90	3000K	24°
KLK-PS55-14W-940-24	1000Lm					
KLK-PS55-14W-930-36	950Lm	14W	DC48V	90	3000K	36°
KLK-PS55-14W-940-36	1000Lm					




Decorative light


Low Voltage System



Drawings



Order Options



KLK-PDS40-12W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-PDS40-12W-930-15	800Lm	12W	13W	DC48V	90	3000K	15°
KLK-PDS40-12W-940-15	900Lm						
KLK-PDS40-12W-930-35	800Lm	12W	13W	DC48V	90	3000K	35°
KLK-PDS40-12W-940-35	900Lm						
KLK-PDS40-12W-930-45	800Lm	12W	13W	DC48V	90	3000K	45°
KLK-PDS40-12W-940-45	900Lm						

Optional color






Decorative light insert



Drawings

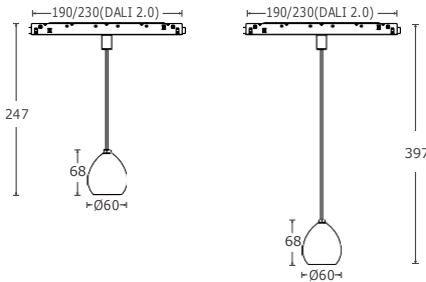

Order Options

KLK-SURI60-5W						
Code	SystemLM	System W	InputVoltage	CRI	CCT	Beam
KLK-SURI60-5W-930-18	500Lm	5W	DC48V	90	3000K	18°
KLK-SURI60-5W-940-18	550Lm				4000K	
KLK-SURI60-5W-930-24	500Lm	5W	DC48V	90	3000K	24°
KLK-SURI60-5W-940-24	550Lm				4000K	
KLK-SURI60-5W-930-36	500Lm	5W	DC48V	90	3000K	36°
KLK-SURI60-5W-940-36	550Lm				4000K	
KLK-SURI60-5W-930-50	500Lm	5W	DC48V	90	3000K	50°
KLK-SURI60-5W-940-50	550Lm				4000K	

Optional






Decorative light
Low Voltage System

-
-
- White
- Black


Drawings



Order Options




KLK-NVP12-19W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-NVP12-19W-930	1700Lm	17W	19W	DC48V	90	3000K 4000K	360°

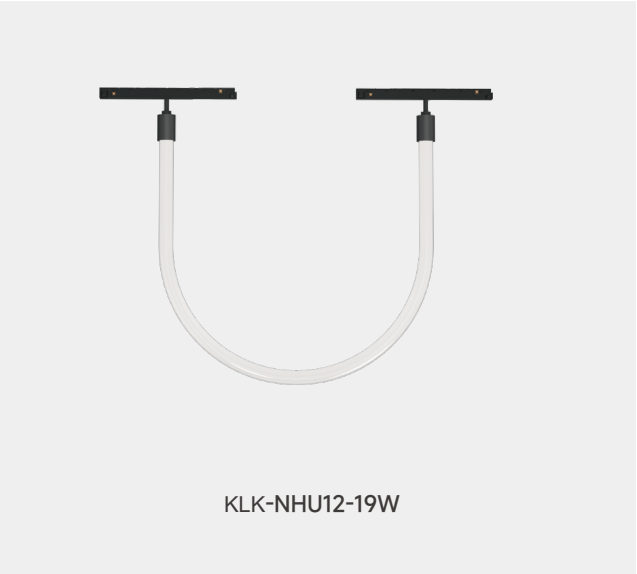

Decorative light
Low Voltage System

-
-
-
- White
- Black
- Golden


Drawings

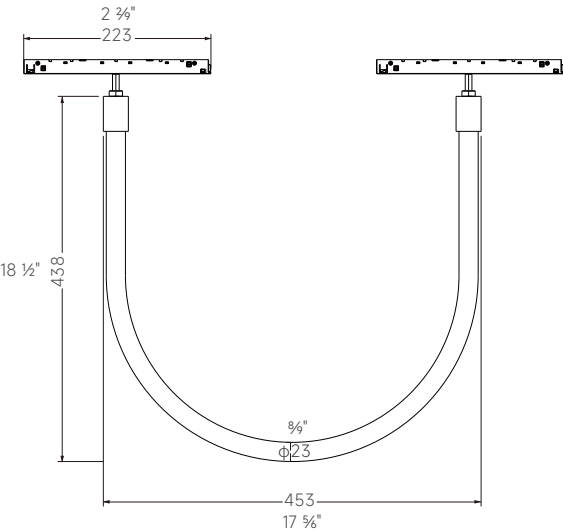

Order Options



KLK-NHU12-19W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-NHU12-19W-930	1700Lm	17W	19W	DC48V	90	3000K 4000K	360°

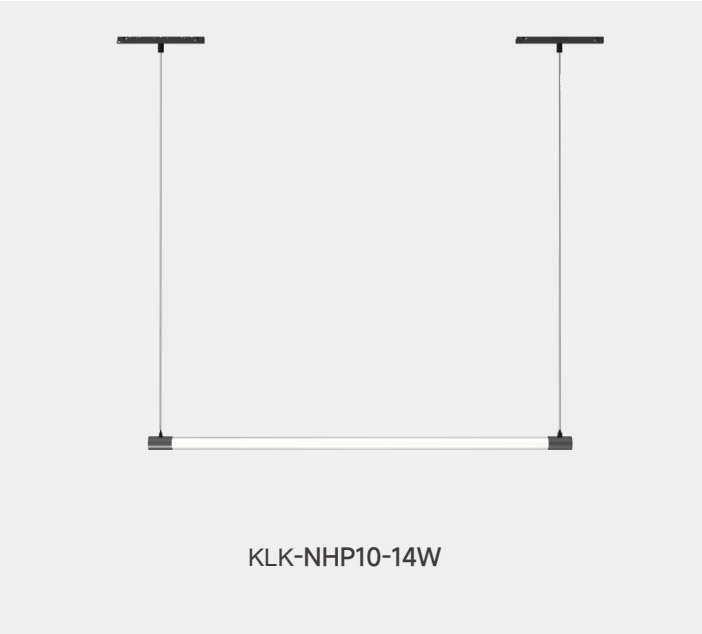


Decorative light

Low Voltage System

- White
- Black
- Golden

Drawings

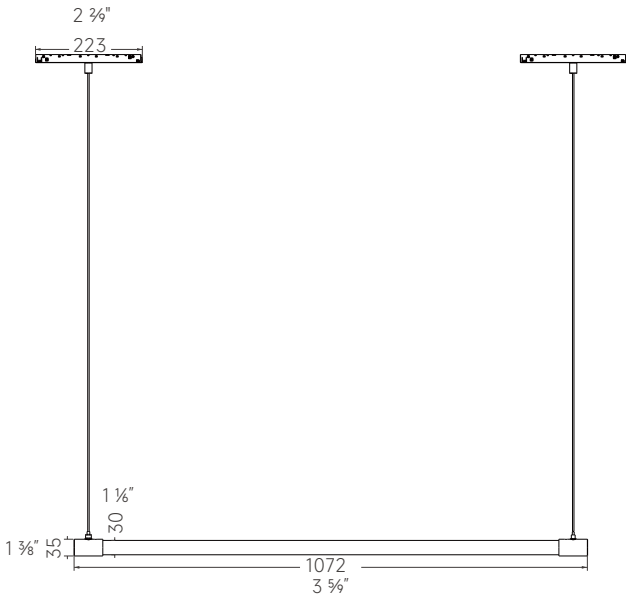


Order Options



KLK-NHP10-14W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
KLK-NHP10-14W-930	1400Lm	13W	14W	DC48V	90	3000K 4000K	360°

How to order

code ordering example for track:

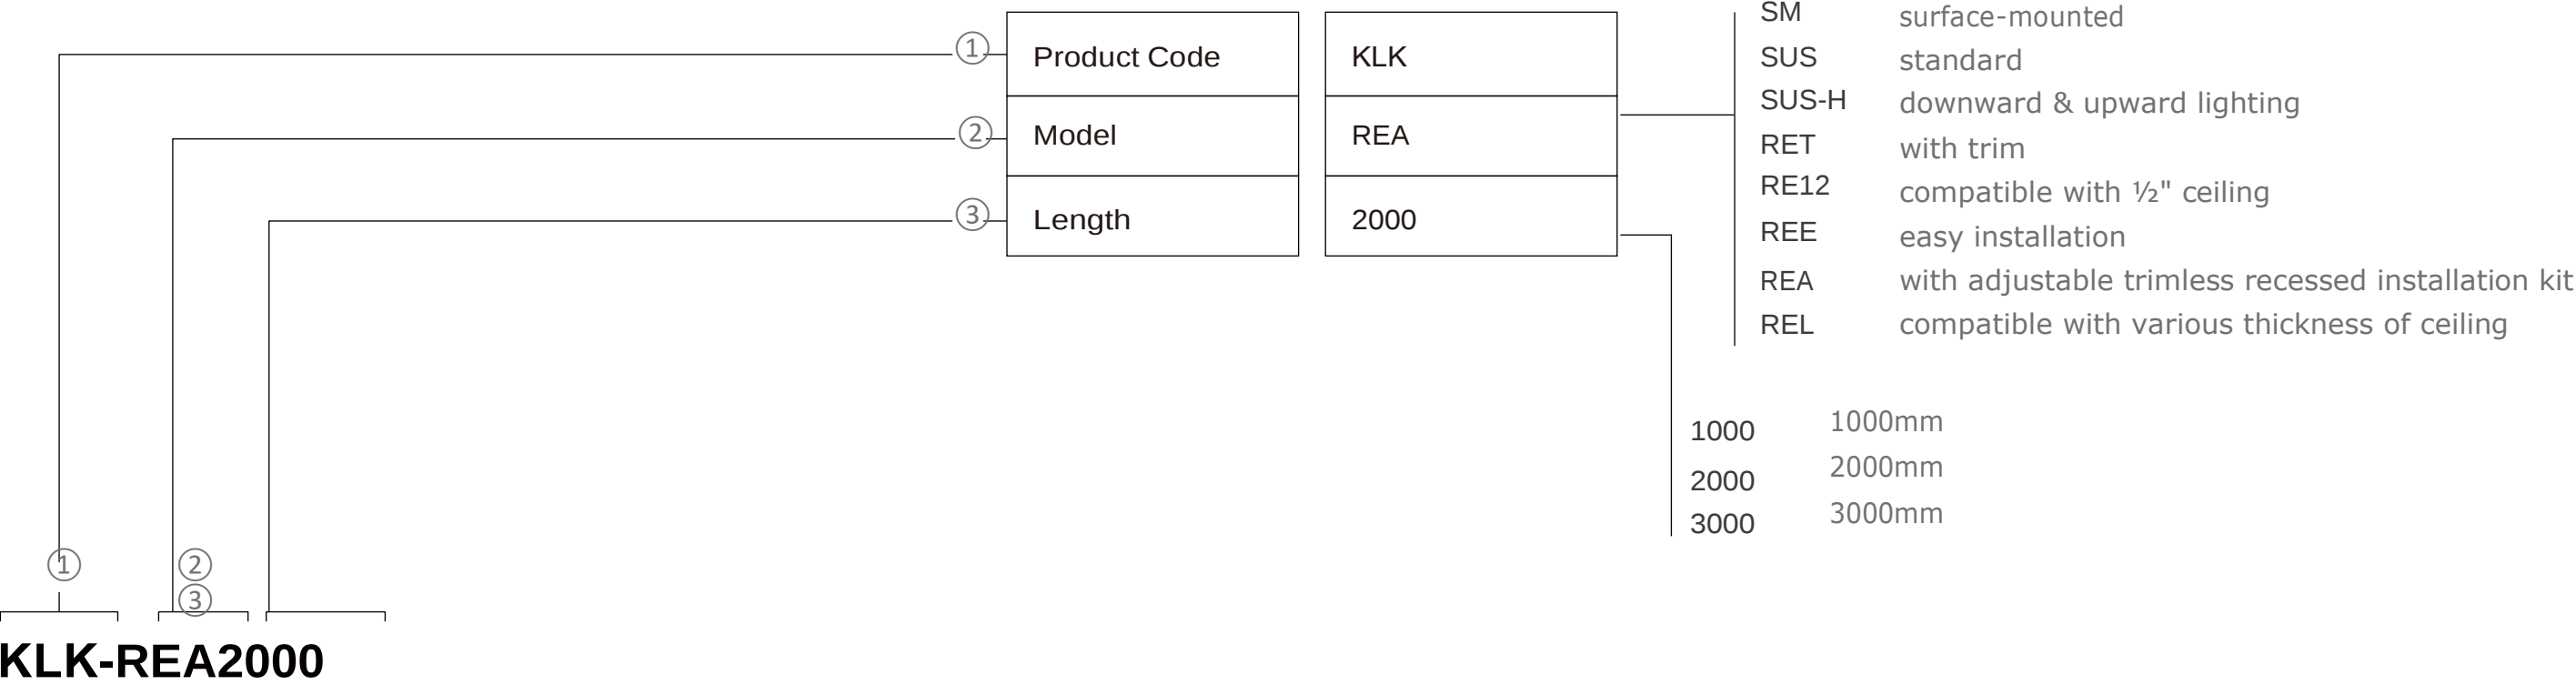

All dimensions in the catalogue in mm

How to order

code ordering example for insert:

①

②

③

④

⑤

⑥

⑦

⑧

①

②

③

④

⑤

⑥

⑦

⑧

ProductCode	KLK
Model	WRD72
SystemWattage	8W
CRI	CRI>90
CCT	3000K
BeamAngle	25°
Dimming Type	ON-OFF
Color	RAL9005 BLACK

80

90

CRI>80

CRI>90

25

36

50

25°

36°

50°

KLK

WRD72

8W

930

25D

F

BK

⑤ CCT Colour temperature

- 30

Warm White3000K
- 40

Neutral White4000K

⑦ Dimming Type

- F

ON-OFF
- A

1-10V
- D

DALI

⑧ Color

- BK

RAL9005Black

■
- WH

RAL9016White

□

All dimensions in the catalogue in mm



ORBIT ILLUMINATIONS INC. | 100 BIRMINGHAM ST., STE 200 | TORONTO | ON | M8Z4E6
T: 416-925-7837 E: info@orbit-illuminations.com