

LuxCube ECO 360


RING LED SERIES



Project Information	
Project Name:	
Type:	
Date:	
Location:	
Quantity:	

Description

The LuxCubeECO 360 Series features 360 degree illumination, luminaires available in standard diameters, custom sizes available upon request. Dimming options include 0-10V. Various color temperatures (CCT) are available; 3000K, 3500K, 4000K. With CRI options of 80+ and 90+, and optional sensor technology, the LuxCube ECO 360 Series provides versatile, high-quality lighting solutions tailored to your needs.

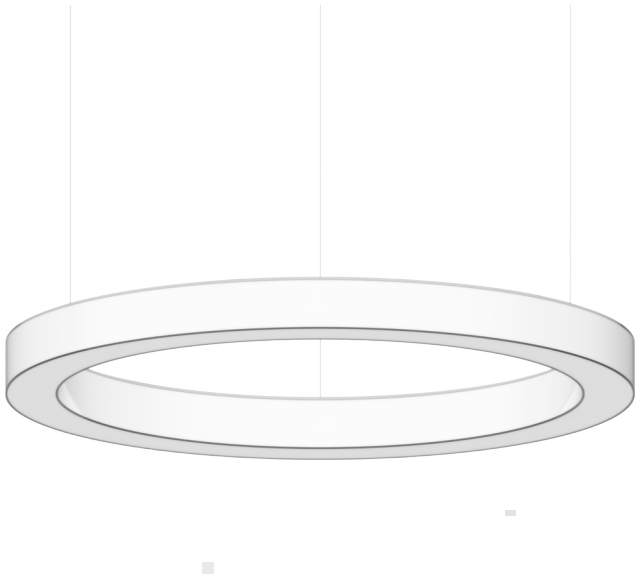

PRODUCT FEATURES

- Pendant or surface mounted
- Single CCT
- PMMA satin diffuser.
- 105 lm/w
- 360 degree illumination
- 50,000+ Hours LED Life Expectancy.
- Power factor: >0.9, flicker free
- 5 Year Warranty.

LM-80



LUMINOUS FLUX (Delivered)

Size	Power*	Light Flux**
24"	40W	4200lm
36"	50W	5250lm
48"	80W	8400lm
59"	100W	10500lm
71"	120W	12600lm
95"	160W	16800lm
118"	200W	21000lm
142"	240W	25200lm
165"	300W	31500lm
189"	400W	42000lm

**Based on 4000K NOTE: Specification subject to change without notice

LuxCube ECO 360

RING LED SERIES




Part No. Generator

VERSION	DIAMETER	LED COLOR	DIMMING	ILLUMINATION	BODY FINISH
RE360					
M=Pendant S=Surface	24=24" 36=36" 47=47" 59=59" 71=71" 95=95" 118=118" 142=142" 165=165" 189=189"	30K=3000K 35K=3500K 40K=4000K	D0=Non Dim D2=0-10V	360	W=White


INPUT	CANOPY	CABLE COLOR	COMMENTS/REQUEST
UNV=120-277V	W=White B=Black	W=White B=Black	

NOTE: Please contact Orbit Illuminations for customizations on any of the above.

PENDANT

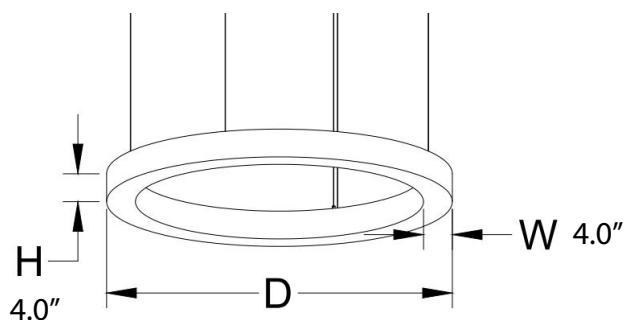

SURFACE

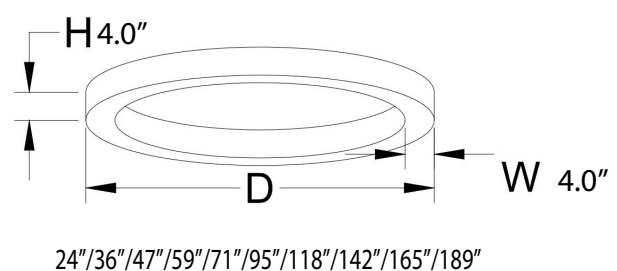

24"/36"/47"/59"/71"/95"/118"/142"/165"/189"


NOTE: Specification subject to change without notice

LuxCube ECO 360


RING LED SERIES



Optical System Information

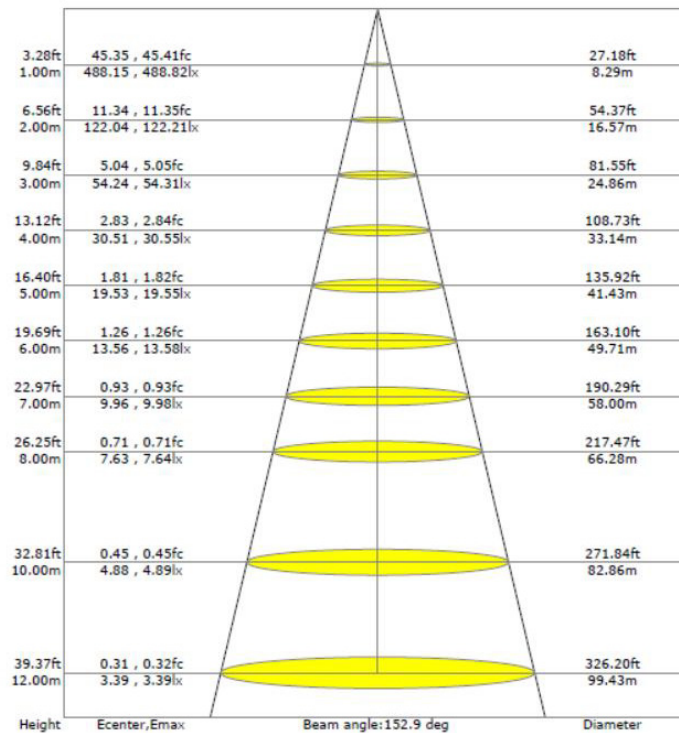

Light Distribution

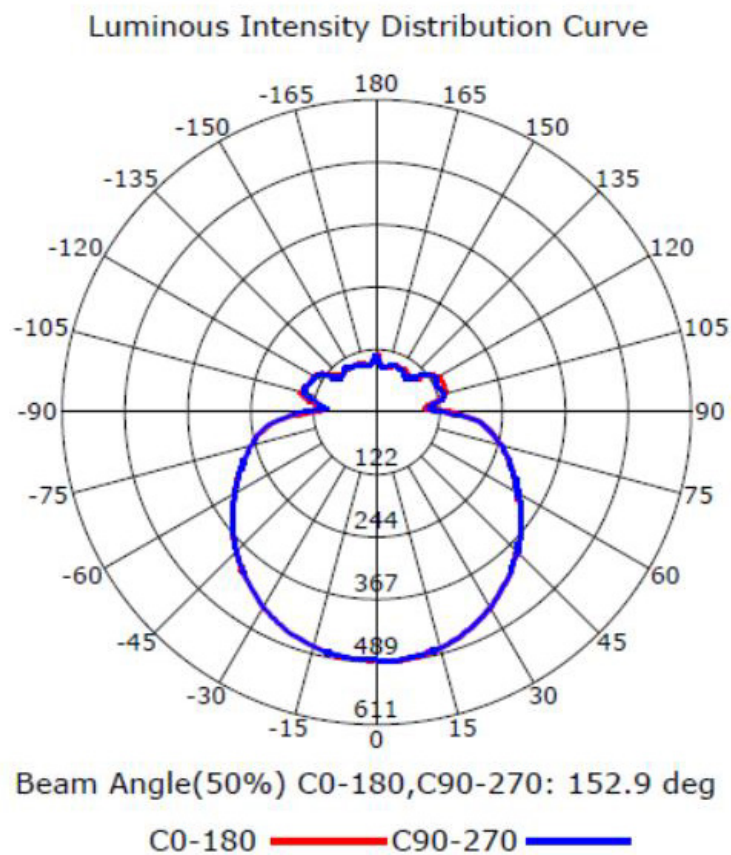

NOTE: Specification subject to change without notice