

NATAL LED Downlight

NAT Series | Retrofit & New Construction



Project Information	
Project Name:	
Type:	
Date:	
Location:	
Quantity:	

NATAL LED commercial downlights are available in 4", 6", 8" and 10" with up to 60w. The innovative separable design of junction box and trim makes it more flexible. Easy-fit installation comes from the adjustable butterfly clips. The downlight is built with an integral junction box that eliminates the need for a traditional recessed housing and mounts directly into ceiling in the new construction which is easy to install. The fixture simply gets wired to a wall switch and placed into the ceiling - no can, bulb or extra labor required! It is designed and engineered for recessed applications, which is suitable for commercial and public places and elegantly decorates the ambience, such as shopping mall, hospital, airport, hotel lobby etc.



Feature

- UL, CUL , Energy Star and Damp Rated
- 60W maximum with 4", 6", 8" and 10" trim size options
- Available in round, square, round wall wash and square wall wash trims
- Twist-lock modular design
- Integrated J-box for direct wire, eliminated recessed can
- CCT adjustable and wattage selectable
- New construction frame kit available



Maximum 20W
80+CRI

Maximum 40W
80+CRI




Maximum 60W
80+CRI

PERFORMANCE

Item	Lumen Output			Type
	High	Medium	Low	
Maximum 20W	20W,1500LM (75LM/W)	15W,1170LM (78LM/W)	10W,800LM (80LM/W)	IC
Maximum 40W	40W,3200LM (80LM/W)	34W,2890LM (85LM/W)	27W,2430LM (90LM/W)	NON-IC
Maximum 60W	60W,6180LM (103LM/W)	50W,5300LM (106LM/W)	40W,4360LM (109LM/W)	NON-IC

Remark: Maximum 20W with 4", 6", 8" trims and maximum 40w with 4", 6", 8", 10" trims are listed on Energy Star. All efficacy are subject to 4000K which has ±5% base on different CCT and Trims. Check the IES file to gain the accurate data .



NATAL LED Downlight

NAT Series | Retrofit & New Construction



PRODUCT ORDERING GUIDE

Example: NAT6-D20W-35W

NAT			D		
Product Series	Cutout Size		0-10V Dim		Wattage & CCT
NAT J-Box LED Downlight	4 4 Inch	QuickShip	D Maximum 20W and 40W Version: 120-347V AC, dims to 10%	QuickShip	20W-35W Wattage Selectable (20W, 15W, 10W) CCT Adjustable (3000K, 3500K, 4000K)
	6 6 Inch	QuickShip			
	8 8 Inch (Only for round trim)	QuickShip	Maximum 60W Version: 120-277V AC, dims to 1%		20W-50E Wattage Selectable (20W, 15W, 10W) CCT Adjustable (3000K, 4000K, 5000K)
	10 10 Inch (Only for round trim)	QuickShip	<i>Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.</i>		40W-35T Wattage Selectable (40W, 34W, 27W) CCT Adjustable (3000K, 3500K, 4000K)
					60W-35T Wattage Selectable (60W, 50W, 40W) CCT Adjustable (3000K, 3500K, 4000K) (Only for 6"/8"/10" round trim and 6" square trim Can't compatible with all size wall wash trim and 4inch round/square trim.)

OPTIONAL ACCESSORY




Trim Shape & Color	Optional Mounting Kit	Optional Emergency Function
RWR Round White Ring+Haze Reflector 4", 6", 8" 10" Trims Available 	FKR New Construction Round Frame Kit For 3"~8" Downlights QuickShip	Field-installed (Pre-wired option available) Only external 8w or 25w LED emergency driver with standard indicator available. 
RBR Round Black Trim 4", 6", 8" Trims Available 	FKRJ New Construction Round Frame Kit With J-Box For 3"~8" Downlights QuickShip	
RHR Round Haze Trim 4", 6", 8" Trims Available 	FKS New Construction Square Frame Kit For 4"~6" Downlights QuickShip	EME/EM-H08170 8W Emergency LED Driver QuickShip
RRR Round Rosé Trim 4", 6" Trims Available 	FKSJ New Construction Square Frame Kit With J-Box For 4"~6" Downlights QuickShip	EME/EM-H25170 25W Emergency LED Driver QuickShip
SWR Square White Ring+Haze Reflector 4", 6" Trims Available 	 UP TO 60W NON-IC (Only for 6"/8"/10" round trim and 6" square trim) UP TO 40W NON-IC (For all trims) UP TO 20W IC (For all trims)	
RWW Round Wall Wash White Ring+Haze Reflector 4", 6" Trims Available 		
SWW Square Wall Wash White Ring+Haze Reflector 4", 6" Trims Available 		

NATAL LED Downlight

NAT Series | Retrofit & New Construction



ENGINE



TRIM DIMENSIONS

NAT-20W

4" Round Trims



White Ring+
Haze Reflector
QuickShip






Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Mounting Diameters: 4.7"-5.2"

6" Round Trims



White Ring+
Haze Reflector
QuickShip






Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Mounting Diameters: 6"-7.3"

8" Round Trims



White Ring+
Haze Reflector
QuickShip





Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Mounting Diameters: 7.4"-8.9"

10" Round Trims



White Ring+
Haze Reflector
QuickShip






Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip

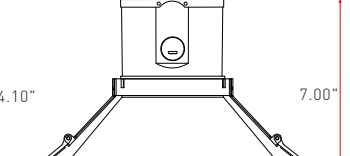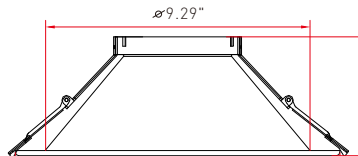

Mounting Diameters: 9.5"-10.8"

4" Round Wall Wash Trims



White Ring+
Haze Reflector
QuickShip





Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Tilt: 15°
Mounting Diameters: 5.3"-6"

6" Round Wall Wash Trims



White Ring+
Haze Reflector
QuickShip





Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Tilt: 15°
Mounting Diameters: 6"-7.3"

NATAL LED Downlight




NAT Series | Retrofit & New Construction



TRIM DIMENSIONS

NAT-20W




4" Square Trims



White Ring+
Haze Reflector
QuickShip

Mounting Diameters: 5.3"-6"




6" Square Trims



White Ring+
Haze Reflector
QuickShip

Mounting Diameters: 6"-7.3"

4" Square Wall Wash Trims






White Ring+
Haze Reflector
QuickShip

Tilt: 15°

Mounting Diameters: 5.3"-6"

6" Square Wall Wash Trims



White Ring+
Haze Reflector
QuickShip

Tilt: 15°

Mounting Diameters: 6"-7.3"

NATAL LED Downlight

NAT Series | Retrofit & New Construction



TRIM DIMENSIONS

NAT-40W

4" Round Trims



White Ring+
Haze Reflector
QuickShip






Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Mounting Diameters: 4.7"-5.2"

6" Round Trims



White Ring+
Haze Reflector
QuickShip






Haze Trim
QuickShip



Rosé Trim
QuickShip



Black Trim
QuickShip



Mounting Diameters: 6"-7.3"

8" Round Trims






White Ring+
Haze Reflector
QuickShip



Haze Trim
QuickShip



Black Trim
QuickShip






Mounting Diameters: 7.4"-8.9"

10" Round Trims



White Ring+
Haze Reflector
QuickShip

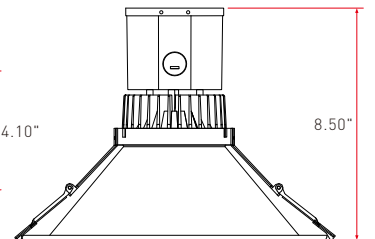
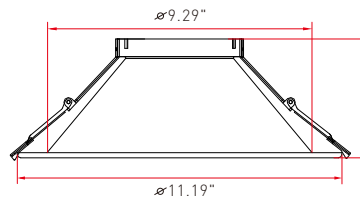



Mounting Diameters: 9.5"-10.8"

4" Round Wall Wash Trims



White Ring+
Haze Reflector
QuickShip






Tilt: 15°

Mounting Diameters: 5.3"-6"

6" Round Wall Wash Trims



White Ring+
Haze Reflector
QuickShip



Tilt: 15°

Mounting Diameters: 6"-7.3"

NATAL LED Downlight




NAT Series | Retrofit & New Construction



TRIM DIMENSIONS

NAT-40W




4" Square Trims



White Ring+
Haze Reflector
QuickShip

Mounting Diameters: 5.3"-6"




6" Square Trims



White Ring+
Haze Reflector
QuickShip

Mounting Diameters: 6"-7.3"

4" Square Wall Wash Trims






White Ring+
Haze Reflector
QuickShip

Tilt: 15°

Mounting Diameters: 5.3"-6"

6" Square Wall Wash Trims



White Ring+
Haze Reflector
QuickShip

Tilt: 15°

Mounting Diameters: 6"-7.3"

NATAL LED Downlight



NAT Series | Retrofit & New Construction



TRIM DIMENSIONS




NAT-60W

6" Round Trims






Mounting Diameters: 6"-7.3"

8" Round Trims






Mounting Diameters: 7.4"-8.9"

10" Round Trims

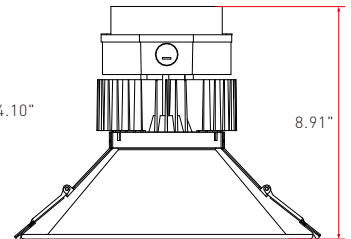

Mounting Diameters: 9.5"-10.8"

6" Square Trims



Mounting Diameters: 6"-7.3"

NATAL LED Downlight

NAT Series | Retrofit & New Construction



Optional New Construction Frame Kits



FKR **QuickShip**
New Construction Round Frame Kit For 3"~8" Downlights





FKS **QuickShip**
New Construction Square Frame Kit For 4"~6" Downlights



FKRJ **QuickShip**
New Construction Round Frame Kit With J-Box For 3"~8" Downlights



FKSJ **QuickShip**
New Construction Square Frame Kit With J-Box For 4"~6" Downlights

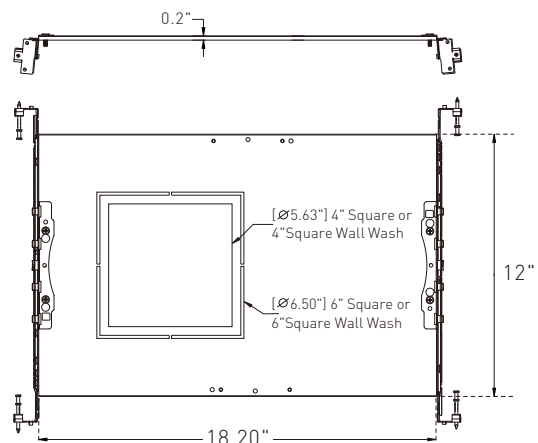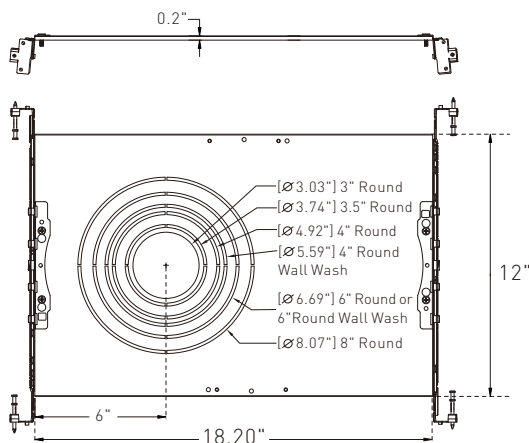


NATAL LED Downlight

NAT Series | Retrofit & New Construction



DISTRIBUTION DIAGRAM

6" 20W Square Trim

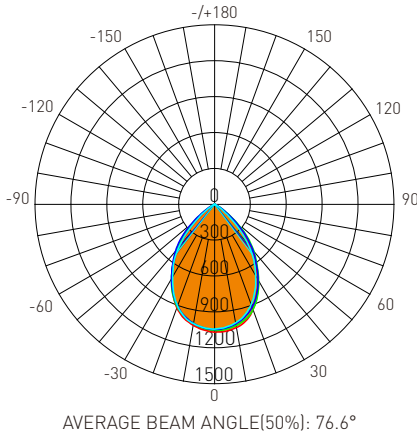

Lumens: 1515.4 Lm
Watts: 20 W
LPW: 75.77 Lm/W
CCT: 4000K

UNIT: cd
C0/180, 75.1 °
C30/210, 77.8 °
C60/240, 78.3 °
C90/270, 75.1 °

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
10	1047	1022	1007	992.7	1027
20	939.2	932.1	893.4	892.4	922.1
30	719.9	739.1	687.3	709.4	711.5
40	471.7	497.7	440.1	477.0	457.8
50	170.8	280.1	158.0	250.7	159.6
60	32.27	62.15	30.20	46.44	33.23
70	2.699	4.711	3.380	4.018	3.231
80	1.543	2.277	2.065	2.620	1.965
90	0.1002	0.0711	0.1300	0.0681	0.1300
100	0.0406	0.0496	0.0406	0.0406	0.0451
110	0.0587	0.1195	0.1128	0.1015	0.1038
120	0.2476	0.3584	0.3114	0.3492	0.3024
130	0.6308	0.7486	0.6814	0.7350	0.7086
140	1.149	1.193	1.150	1.217	1.205
150	1.614	1.648	1.633	1.653	1.682
160	2.155	2.061	2.043	2.088	2.156
170	2.363	2.331	2.304	2.322	2.422
180	2.498	2.444	2.431	2.415	2.503
DEG	LUMINOUS INTENSITY:cd				


Zonal Lumens

T	φ total
0-10	98.17
10-20	371.6
20-30	748.1
30-40	1122
40-50	1389
50-60	1490
60-70	1507
70-80	1510
80-90	1511
90-100	1511
100-110	1511
110-120	1512
120-130	1512
130-140	1513
140-150	1514
150-160	1515
160-170	1515
170-180	1515
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	662	908
80	395	528
75	341	445
70	351	439
65	965	913
60	2869	2684
55	6050	5712
50	11807	10926
45	19770	18214

6" 20W Square Wall Wash

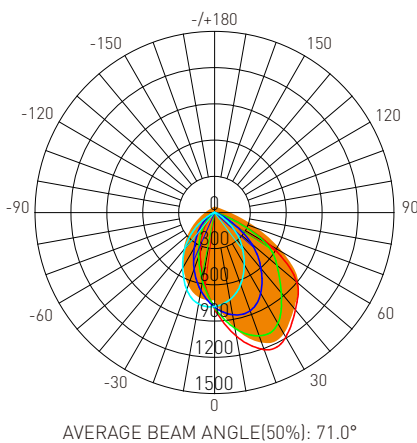

Lumens: 1590.6 Lm
Watts: 20 W
LPW: 79.53 Lm/W
CCT: 4000K

UNIT: cd
C0/180, 65.4 °
C30/210, 68.8 °
C60/240, 72.5 °
C90/270, 77.0 °

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
10	1038	919.6	732.9	585.3	554.5
20	1209	984.8	638.0	411.7	353.7
30	1192	930.7	494.7	267.4	210.7
40	1053	743.2	354.7	155.9	97.27
50	896.8	548.9	205.7	66.71	21.28
60	526.2	310.4	73.90	12.46	5.292
70	136.0	73.16	14.65	4.282	4.094
80	12.17	4.784	1.600	3.400	3.395
90	0.1674	0.0925	0.0768	0.1779	0.0947
100	0.0812	0.0812	0.1175	0.2143	0.3070
110	0.0631	0.0925	0.1760	0.5996	0.7989
120	1.081	0.1646	0.3880	1.220	1.633
130	0.1577	0.2909	0.6721	1.526	2.147
140	0.3513	0.4938	0.9789	1.914	2.359
150	0.6173	0.7667	1.276	2.081	2.534
160	0.9781	1.127	1.565	2.182	2.530
170	1.433	1.522	1.781	2.153	2.340
180	1.935	1.851	1.826	1.847	1.944
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

T	φ total
0-10	73.89
10-20	284.3
20-30	592.3
30-40	929.2
40-50	1235
50-60	1461
60-70	1563
70-80	1584
80-90	1586
90-100	1586
100-110	1586
110-120	1587
120-130	1588
130-140	1588
140-150	1589
150-160	1590
160-170	1590
170-180	1591
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	373	694
80	3114	410
75	9473	779
70	17677	1904
65	31770	3741
60	46776	6569
55	57281	10368
50	62005	14225
45	61916	17780


NATAL LED Downlight

NAT Series | Retrofit & New Construction



DISTRIBUTION DIAGRAM

6" 40W Round Trim

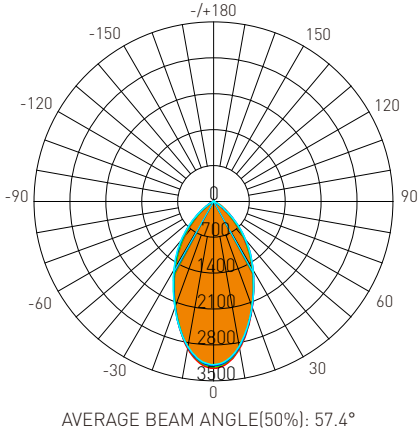

Lumens: 3328.0 Lm
Watts: 40 W
LPW: 83.2 Lm/W
CCT: 4000K

UNIT: cd

— C0/180, 56.4 °
— C30/210, 56.9 °
— C60/240, 57.9 °
— C90/270, 58.4 °

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
10	2916	2896	2871	2857	2912
20	2201	2209	2188	2161	2186
30	1521	1544	1542	1506	1498
40	891.0	956.2	972.7	929.2	869.3
50	335.4	424.5	441.2	395.6	321.0
60	58.83	91.82	97.54	78.63	54.01
70	3.285	2.050	1.504	1.915	3.235
80	1.606	0.8562	0.5011	0.8066	1.591
90	0.1094	0.0676	0.0949	0.0811	0.0721
100	0.0902	0.0812	0.0857	0.0992	0.0993
110	0.1532	0.2302	0.2280	0.2212	0.1986
120	0.5046	0.6317	0.6711	0.6273	0.5778
130	1.262	1.372	1.496	1.403	1.359
140	2.366	2.405	2.542	2.450	2.455
150	3.683	3.717	3.809	3.735	3.735
160	5.157	5.110	5.117	5.088	5.184
170	6.245	6.183	6.145	6.160	6.273
180	6.732	6.710	6.593	6.620	6.755
DEG	LUMINOUS INTENSITY:cd				


Zonal Lumens

T	φ total
0-10	289.3
10-20	997.9
20-30	1840
30-40	2601
40-50	3101
50-60	3290
60-70	3317
70-80	3318
80-90	3319
90-100	3319
100-110	3319
110-120	3320
120-130	3320
130-140	3322
140-150	3324
150-160	3326
160-170	3327
170-180	3328
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	742	162
80	524	163
75	497	189
70	544	249
65	1661	3557
60	6661	11045
55	15820	22953
50	29545	38863
45	47042	55891

6" 40W Round Wall Wash

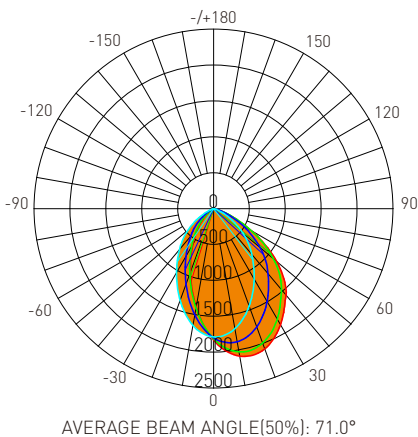

Lumens: 2949.1 Lm
Watts: 40 W
LPW: 73.73 Lm/W
CCT: 3000K

UNIT: cd

— C0/180, 69.2 °
— C30/210, 70.4 °
— C60/240, 72.4 °
— C90/270, 72.2 °

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
10	2085	1962	1700	1461	1397
20	2080	1892	1449	1069	944.4
30	1866	1658	1132	716.4	584.0
40	1572	1343	828.3	446.7	318.6
50	1152	1001	540.1	222.7	107.6
60	593.4	562.8	253.7	36.59	12.99
70	169.5	186.5	59.76	4.875	5.799
80	4.680	16.81	1.576	1.973	2.586
90	0.0996	0.0631	0.0831	0.1709	0.1311
100	0.0811	0.0677	0.1123	0.2708	0.3476
110	0.0812	0.1309	0.3018	0.6949	0.9297
120	0.2162	0.3294	0.7163	1.394	1.832
130	0.4958	0.6814	1.271	2.125	2.851
140	0.9914	1.173	1.857	2.832	3.771
150	1.650	1.822	2.520	3.504	4.325
160	2.502	2.603	3.201	3.991	4.613
170	3.422	3.432	3.765	4.225	4.744
180	4.216	4.104	4.000	4.054	4.230
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

T	φ total
0-10	166.4
10-20	610.3
20-30	1207
30-40	1830
40-50	2383
50-60	2750
60-70	2907
70-80	2940
80-90	2941
90-100	2941
100-110	2942
110-120	2942
120-130	2943
130-140	2945
140-150	2946
150-160	2948
160-170	2949
170-180	2949
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	182	531
80	1526	514
75	14095	3272
70	28056	9893
65	45639	18782
60	67192	28730
55	86754	38552
50	101454	47569
45	111057	55165


NATAL LED Downlight

NAT Series | Retrofit & New Construction



DISTRIBUTION DIAGRAM

6" 60W Round Trim

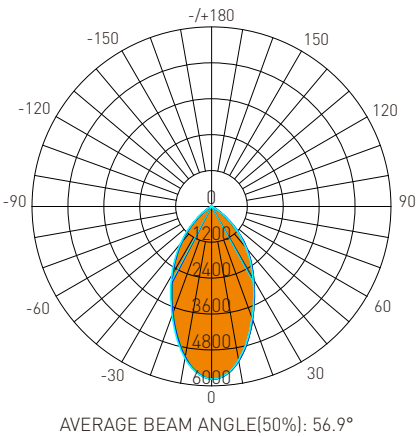

Lumens: 6080.5 Lm
Watts: 60 W
LPW: 105.62 Lm/W
CCT: 4000K

UNIT: cd
— C0/180, 56.9 °
— C30/210, 56.9 °
— C60/240, 56.9 °
— C90/270, 57.1 °

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
10	5234	5256	5211	5157	5112
20	4001	4030	3965	3873	3798
30	2811	2846	2776	2693	2616
40	1791	1860	1784	1668	1555
50	764.7	867.3	846.4	732.7	625.5
60	131.8	177.2	187.4	148.0	114.0
70	2.926	2.726	2.774	2.690	2.956
80	1.046	0.9556	1.165	1.244	1.296
90	0.9362	0.9751	1.060	1.237	0.5501
100	2.605	2.577	2.790	3.024	1.718
110	5.634	5.497	5.834	6.187	4.246
120	10.14	9.931	10.37	10.83	8.178
130	15.96	15.64	16.15	16.63	13.30
140	22.23	21.84	22.31	22.73	19.11
150	27.81	27.32	27.71	27.98	24.72
160	32.27	31.80	32.01	32.24	29.85
170	35.31	35.05	35.00	35.13	33.99
180	36.50	36.61	36.18	36.24	36.48
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

T	φ total
0-10	521.5
10-20	1795
20-30	3302
30-40	4671
40-50	5594
50-60	5952
60-70	6001
70-80	6003
80-90	6004
90-100	6005
100-110	6009
110-120	6016
120-130	6027
130-140	6040
140-150	6055
150-160	6068
160-170	6077
170-180	6080
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	503	597
80	343	381
75	383	379
70	487	461
65	3558	5987
60	15005	21281
55	36550	45136
50	67697	74783
45	101909	104814